


MixPre-3 Setup

SDSU TFM 2018

Setup for recording individual channels without stereo mix down

1. Power on MixPre-3 and Press Menu

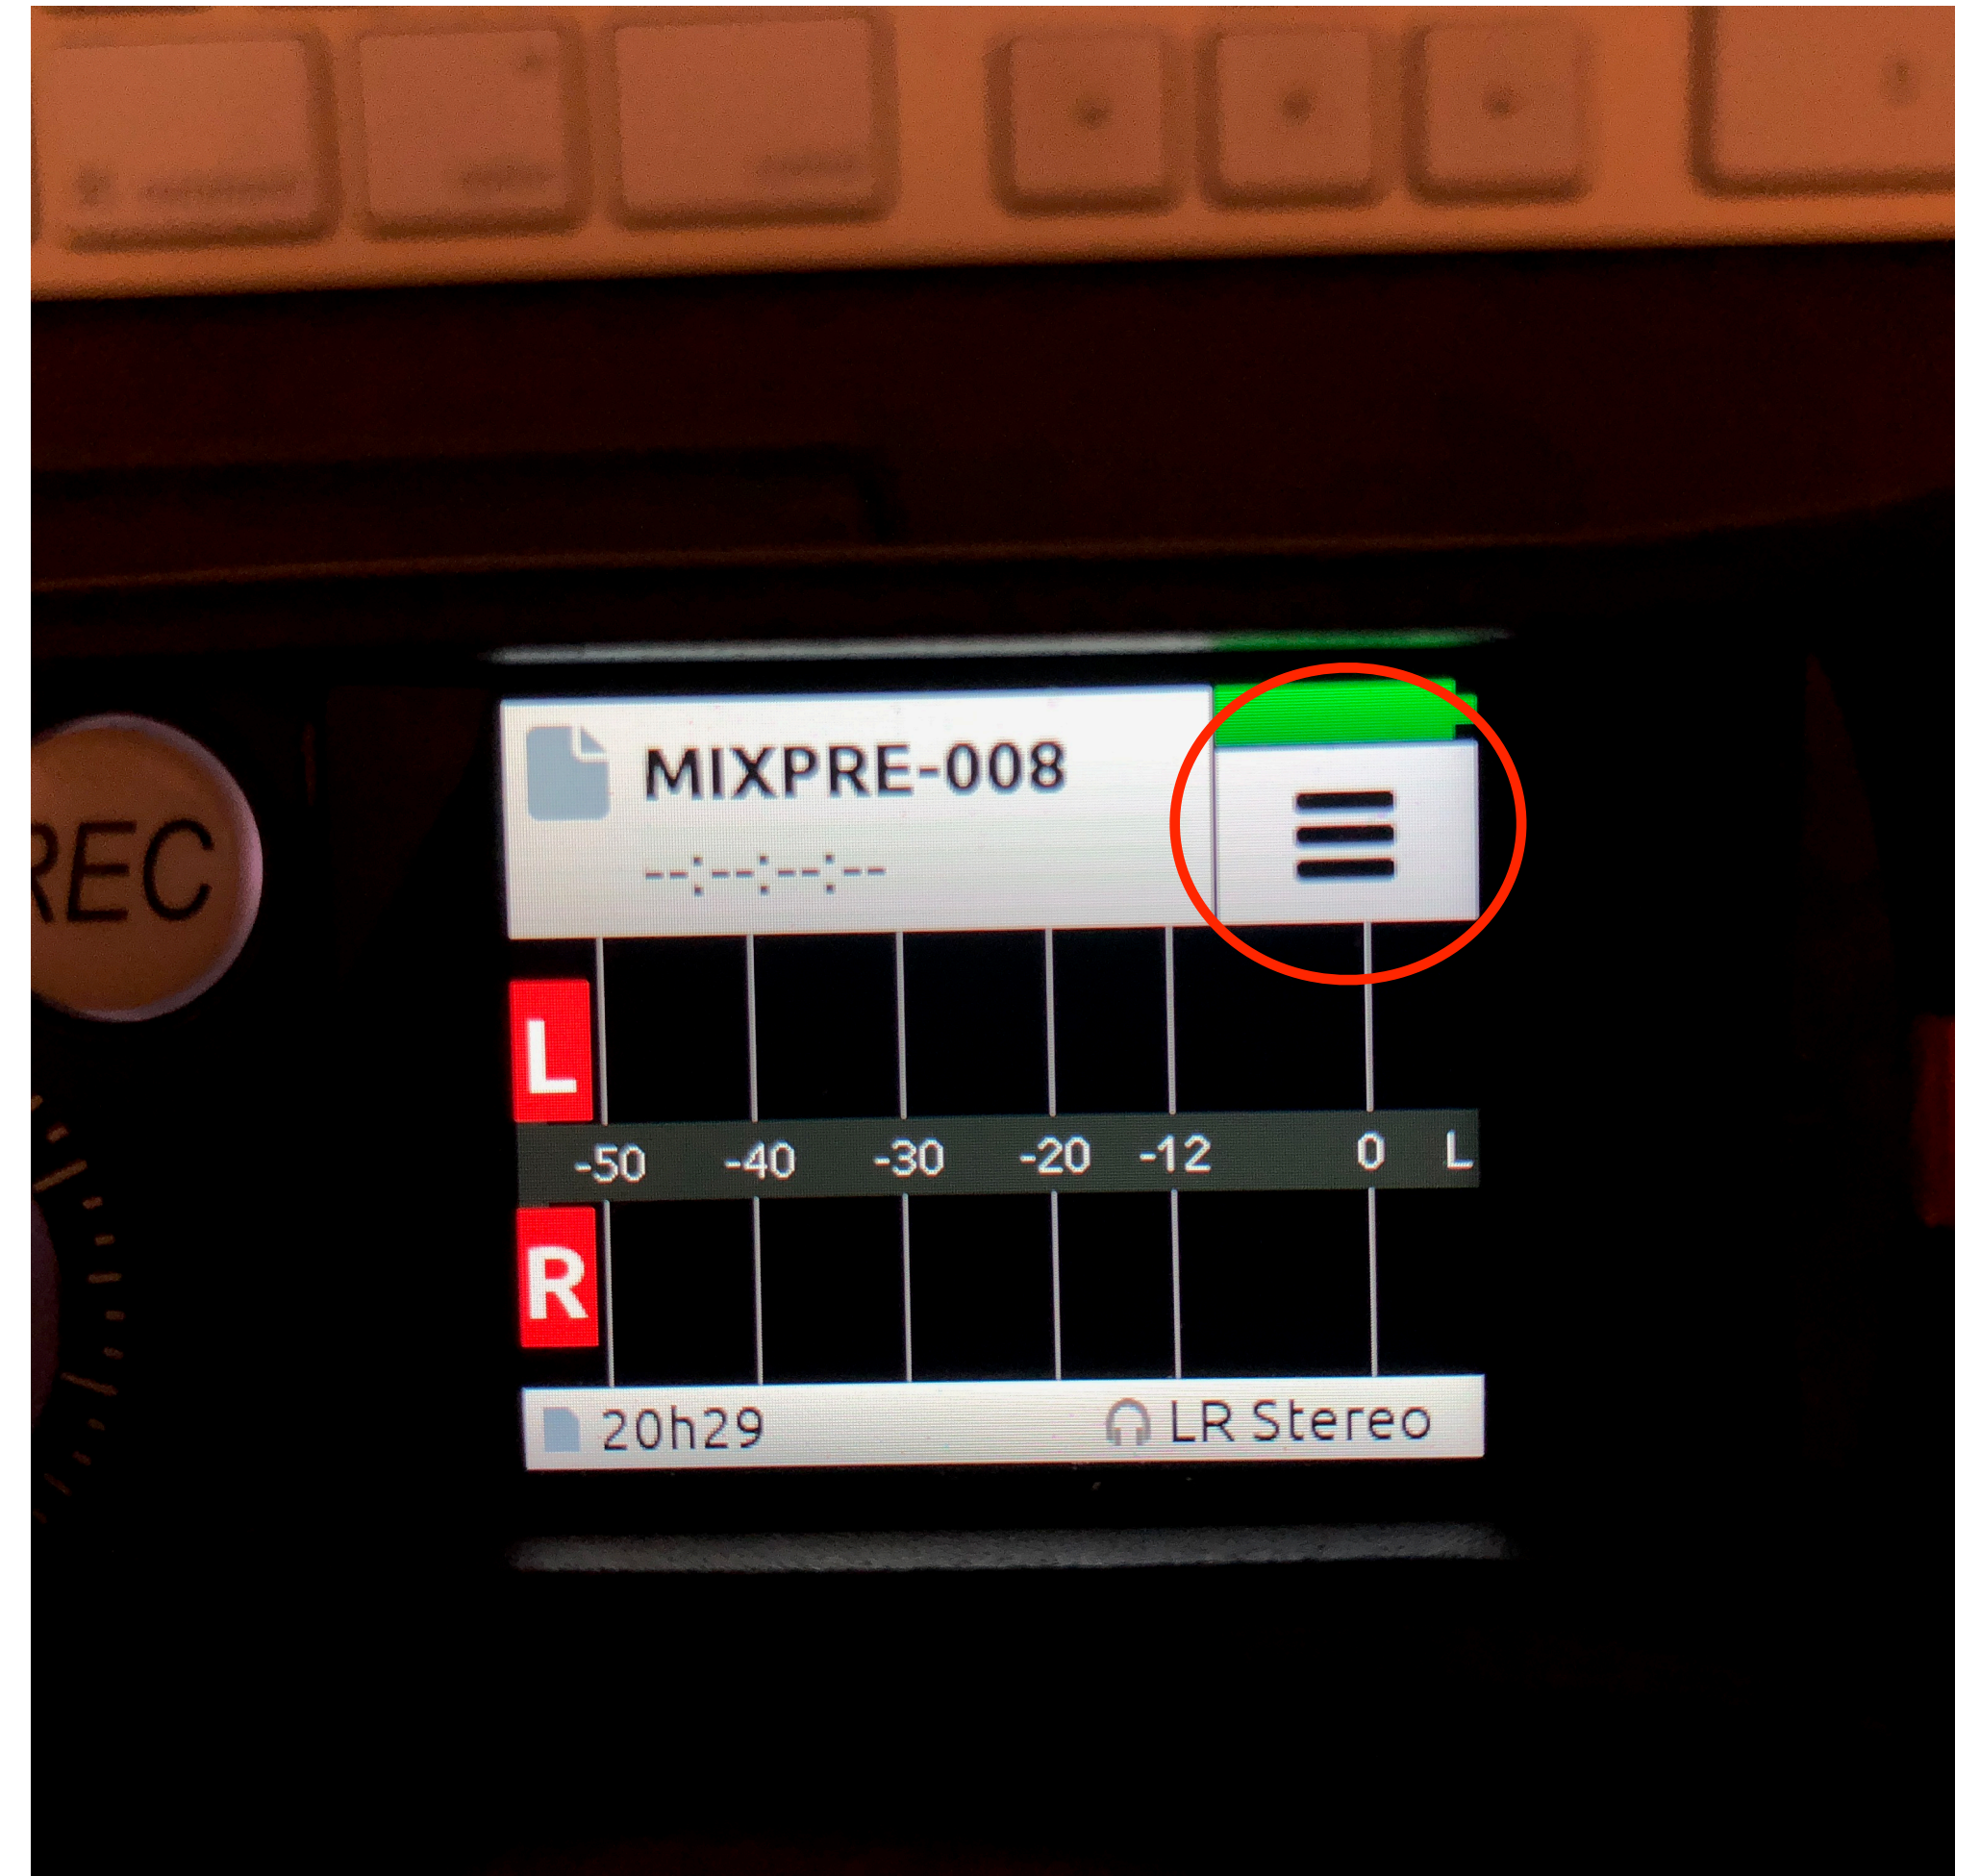

Setup for recording individual channels without stereo mix down

1. Power on MixPre-3 and Press Menu
2. Navigate to the 2nd page and press System.




Setup for recording individual channels without stereo mix down

1. Power on MixPre-3 and Press Menu
2. Navigate to the 2nd page and press System.
3. Select Custom...




Setup for recording individual channels without stereo mix down

1. Power on MixPre-3 and Press Menu
2. Navigate to the 2nd page and press System.
3. Select Custom...
4. SD will warn you to turn all knobs down. Press Ok.

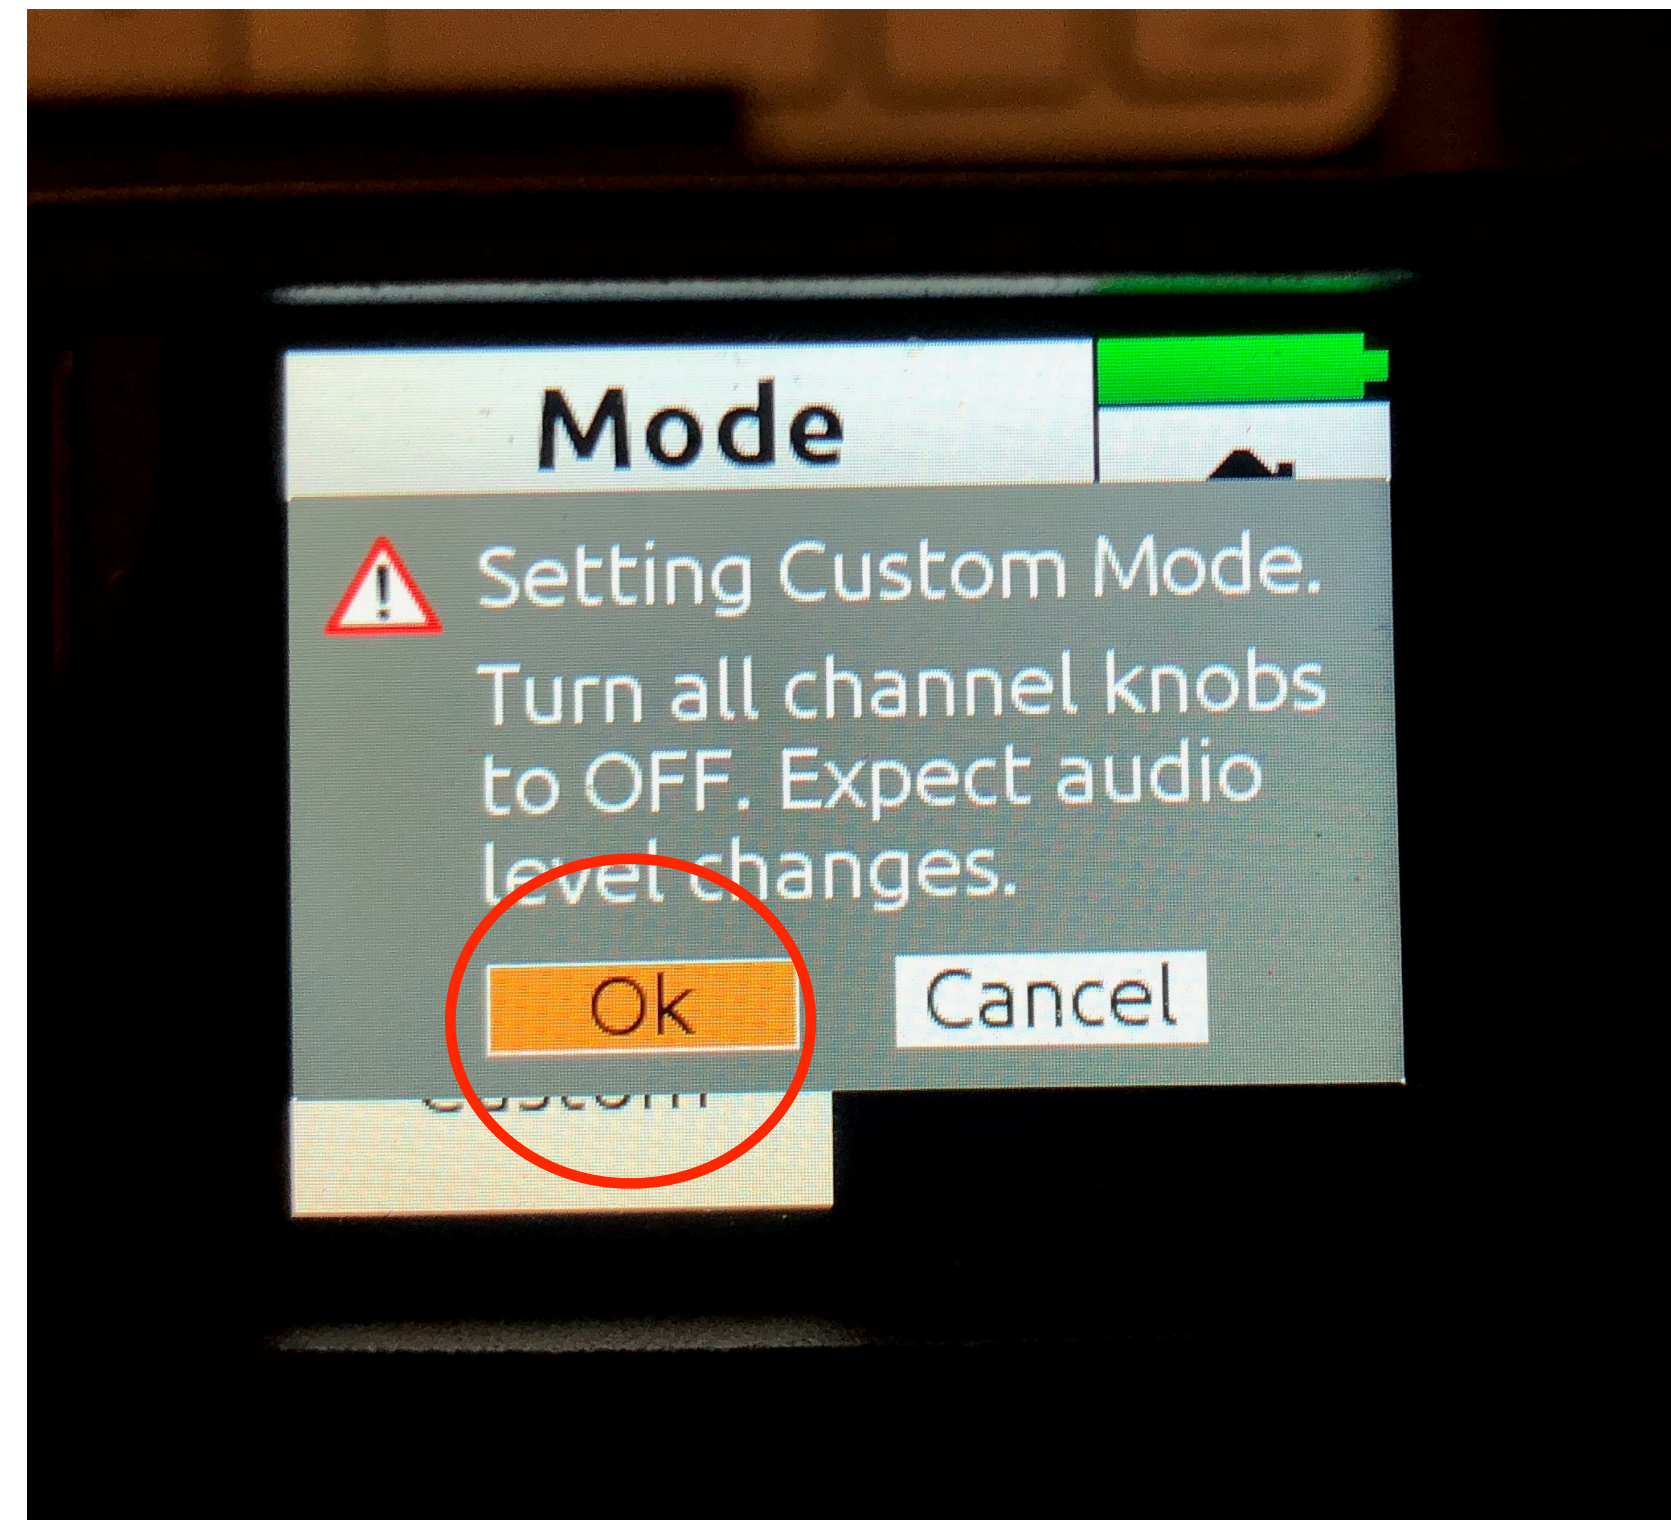



Setup for recording individual channels without stereo mix down

1. Power on MixPre-3 and Press Menu
2. Navigate to the 2nd page and press System.
3. Select Custom...
4. SD will warn you to turn all knobs down. Press Ok. Custom will turn green.

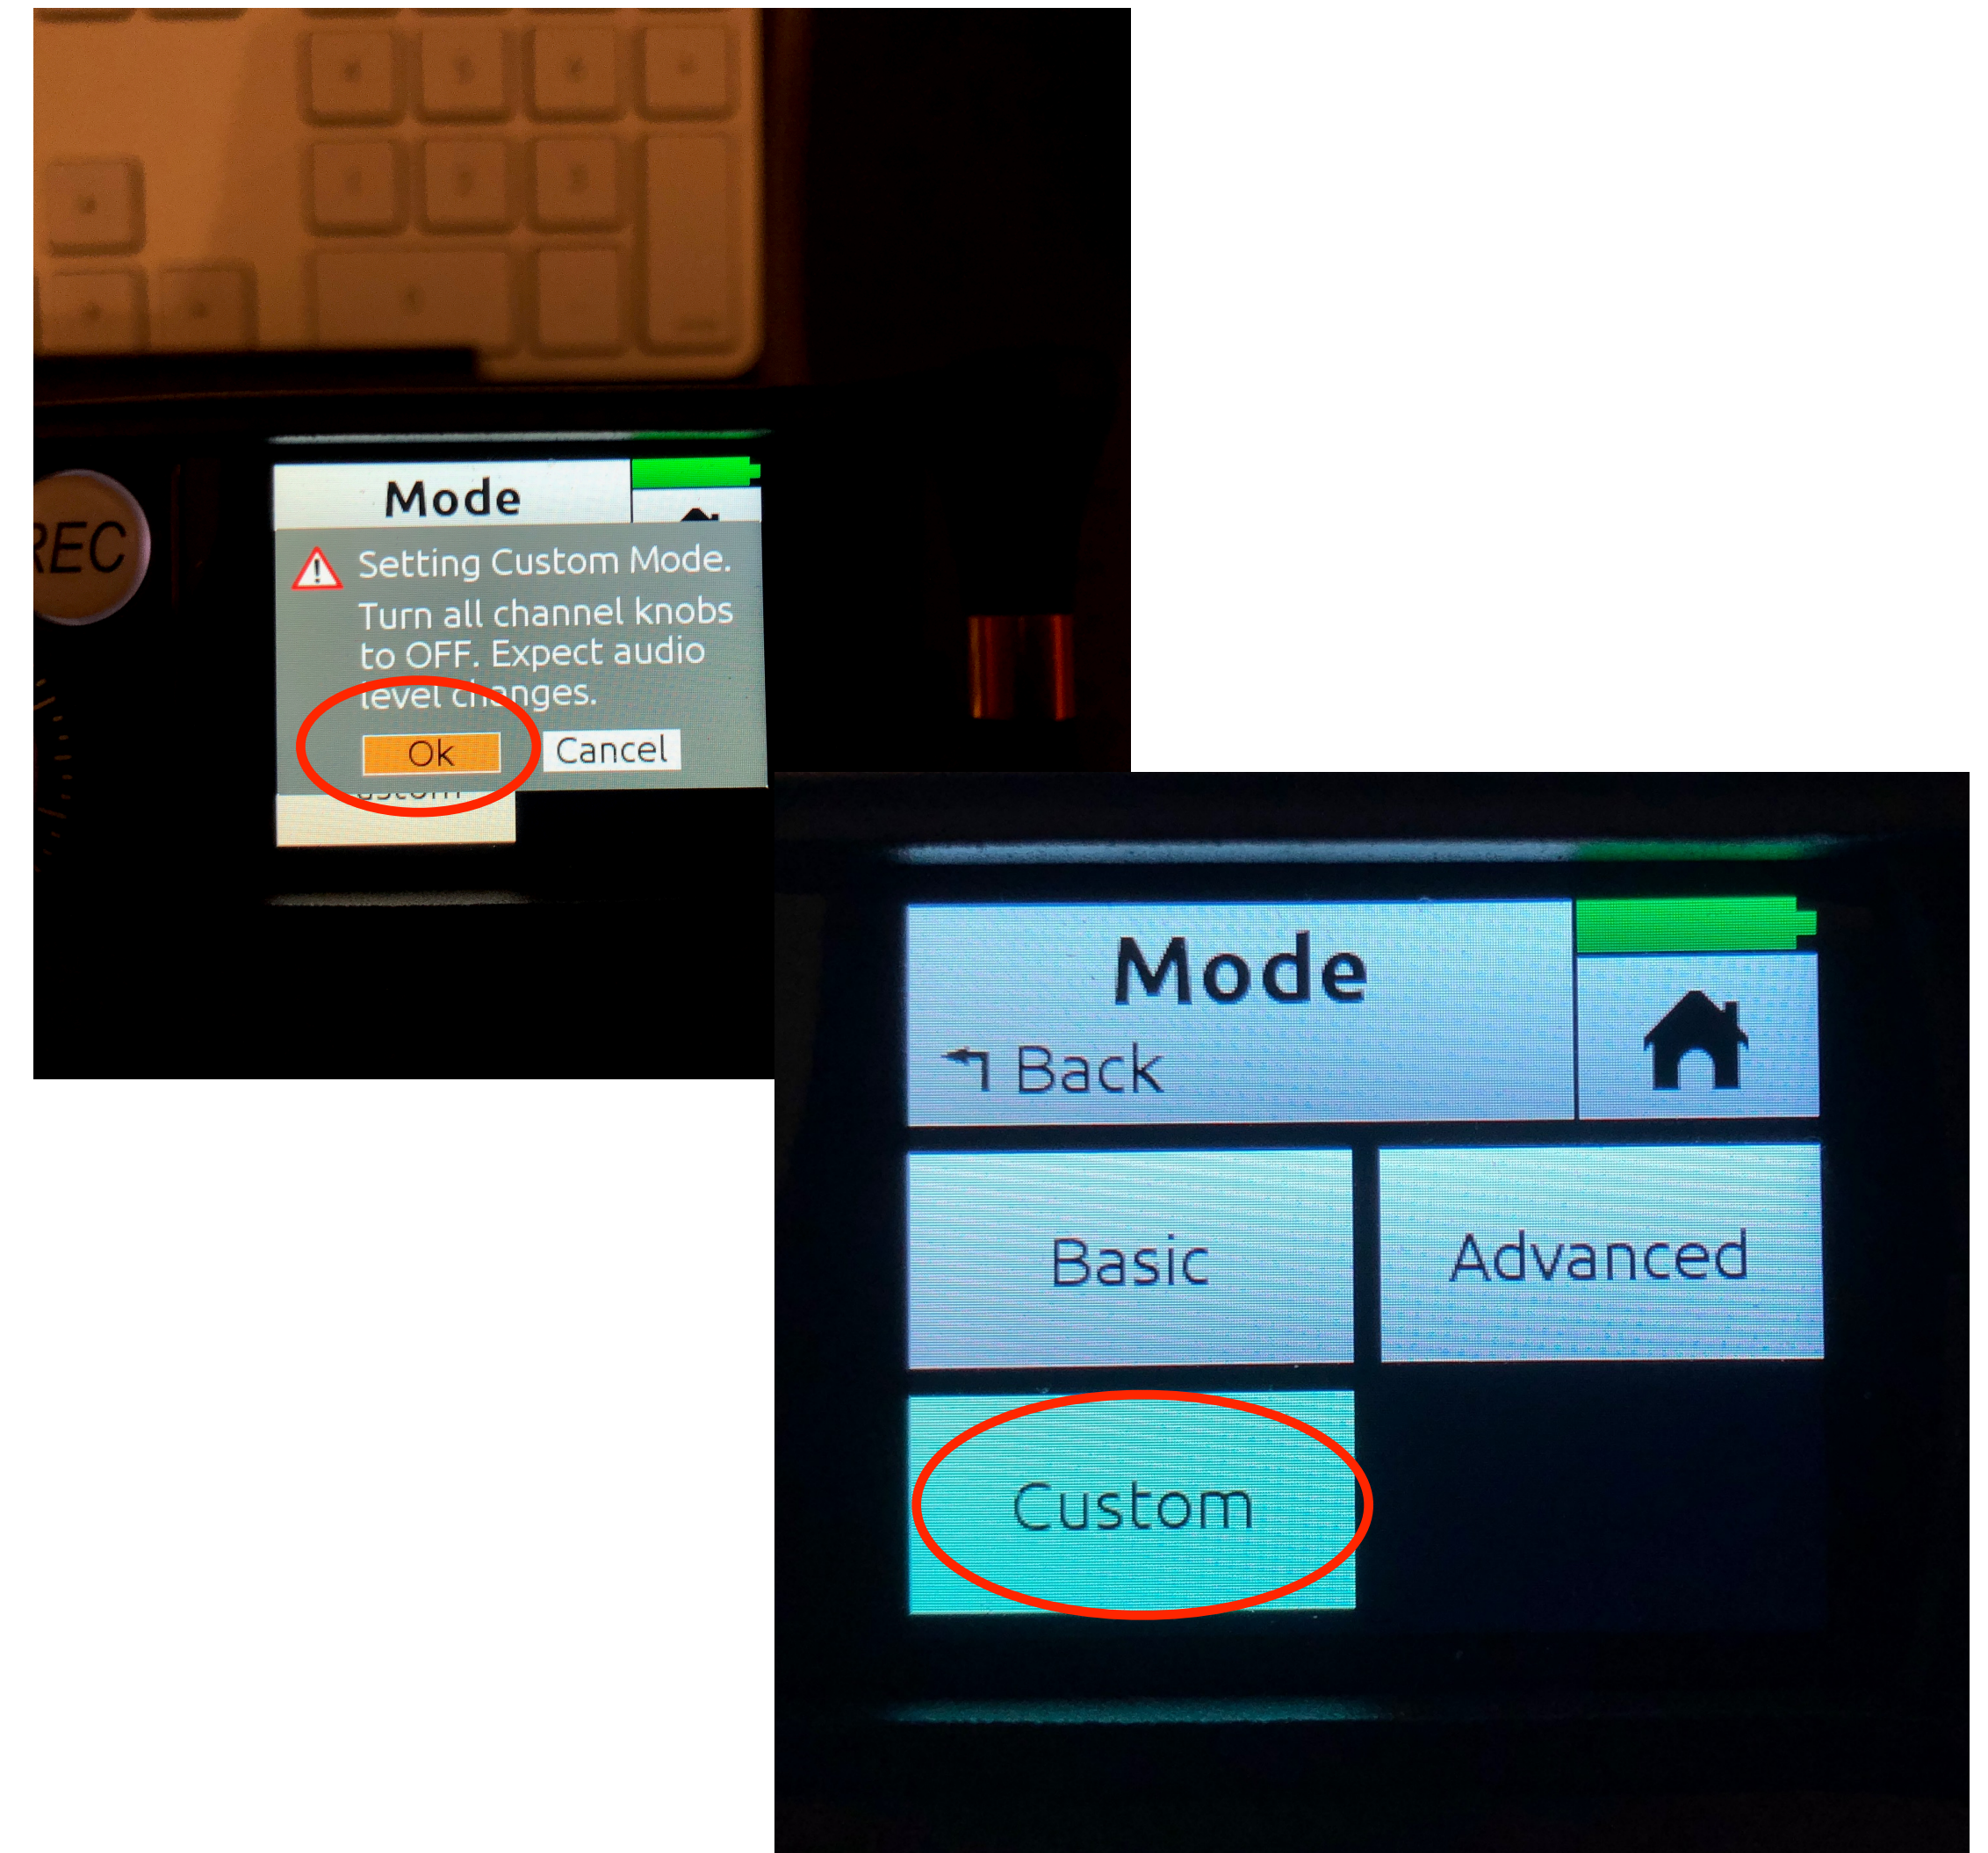

Setup for recording individual channels without stereo mix down

1. Power on MixPre-3 and Press Menu
2. Navigate to the 2nd page and press System.
3. Select Custom...
4. SD will warn you to turn all knobs down. Press Ok. Custom will turn green.
5. Press Back and select Custom Setup.

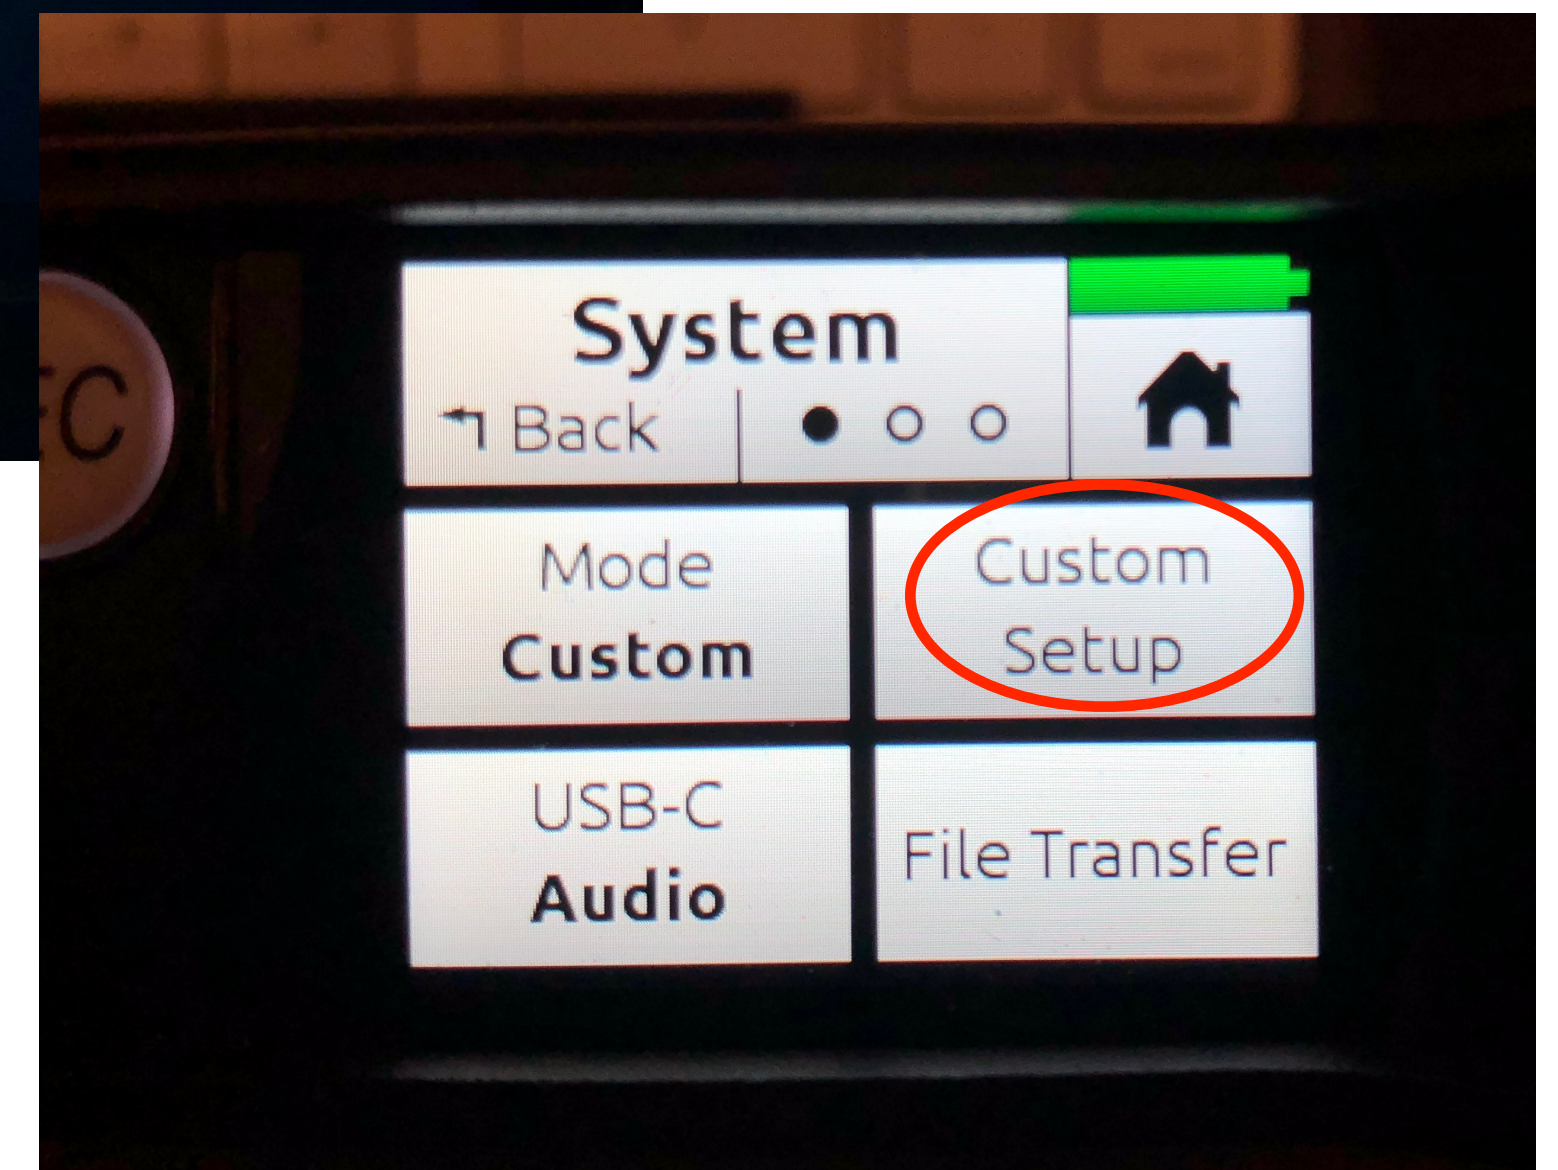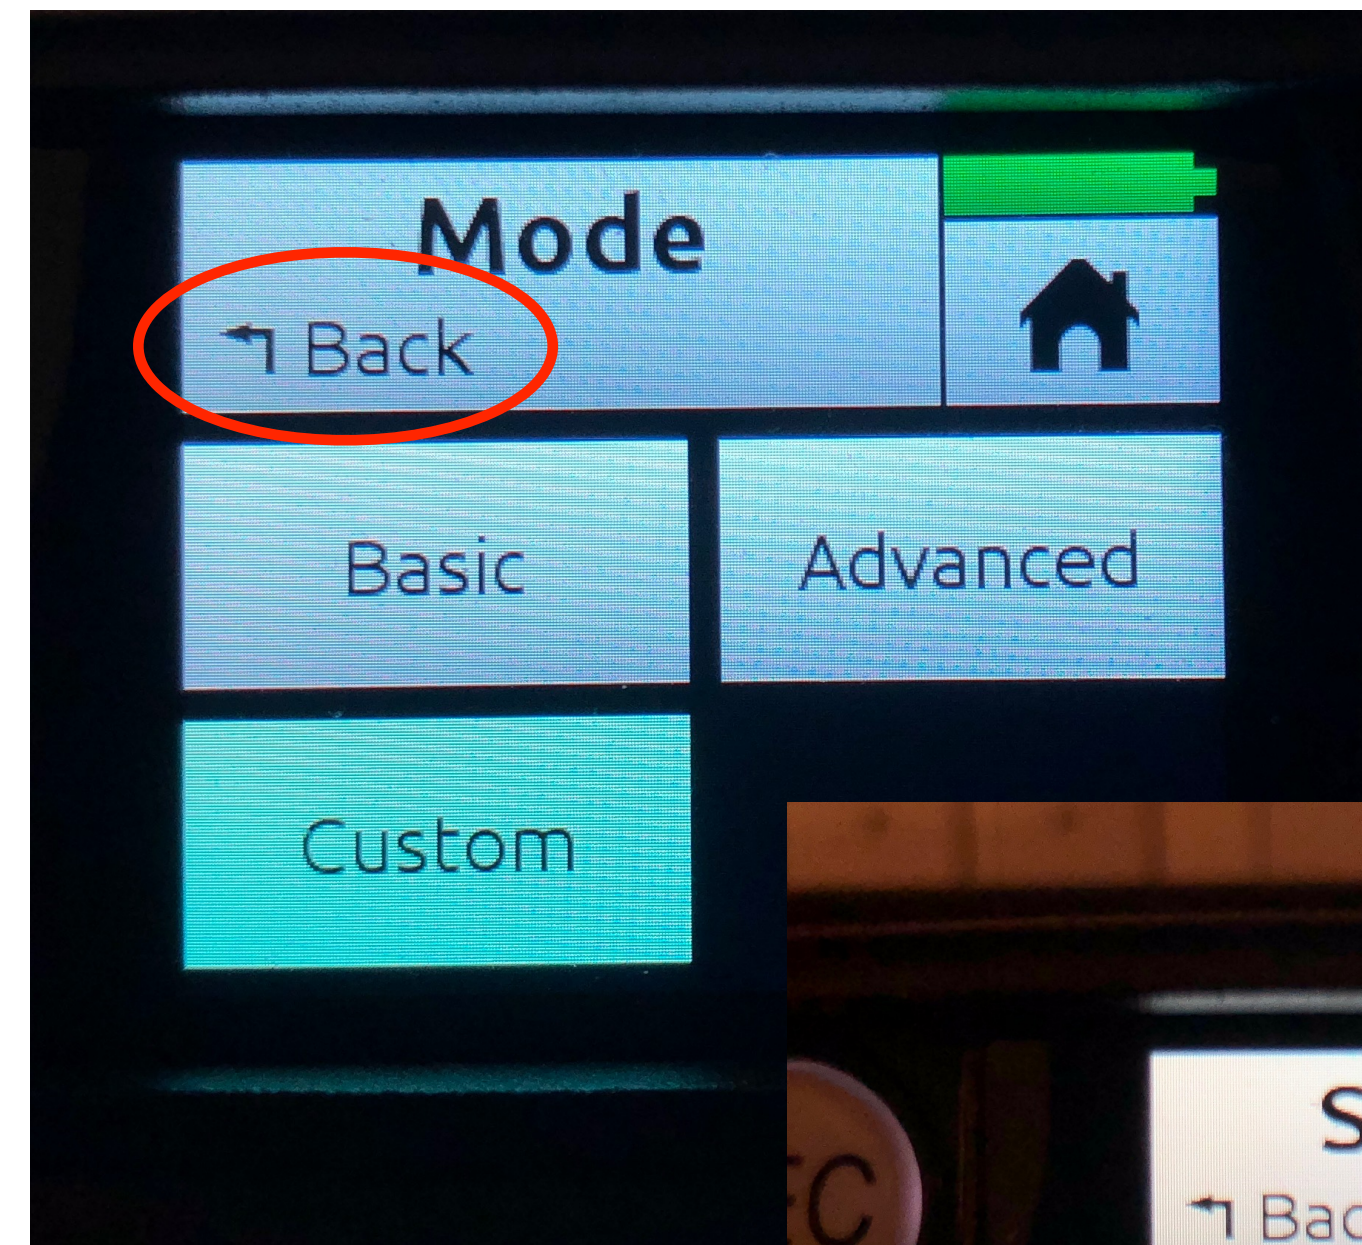


Setup for recording individual channels without stereo mix down

1. Power on MixPre-3 and Press Menu
2. Navigate to the 2nd page and press System.
3. Select Custom...
4. SD will warn you to turn all knobs down. Press Ok. Custom will turn green.
5. Press Back and select Custom Setup.
6. Select Channel Advanced and Record Advanced.




Setup for recording individual channels without stereo mix down

1. Power on MixPre-3 and Press Menu
2. Navigate to the 2nd page and press System.
3. Select Custom...
4. SD will warn you to turn all knobs down. Press Ok. Custom will turn green.
5. Press Back and select Custom Setup.
6. Select Channel Advanced and Record Advanced.
7. Press Back and go to menu page and select Record.

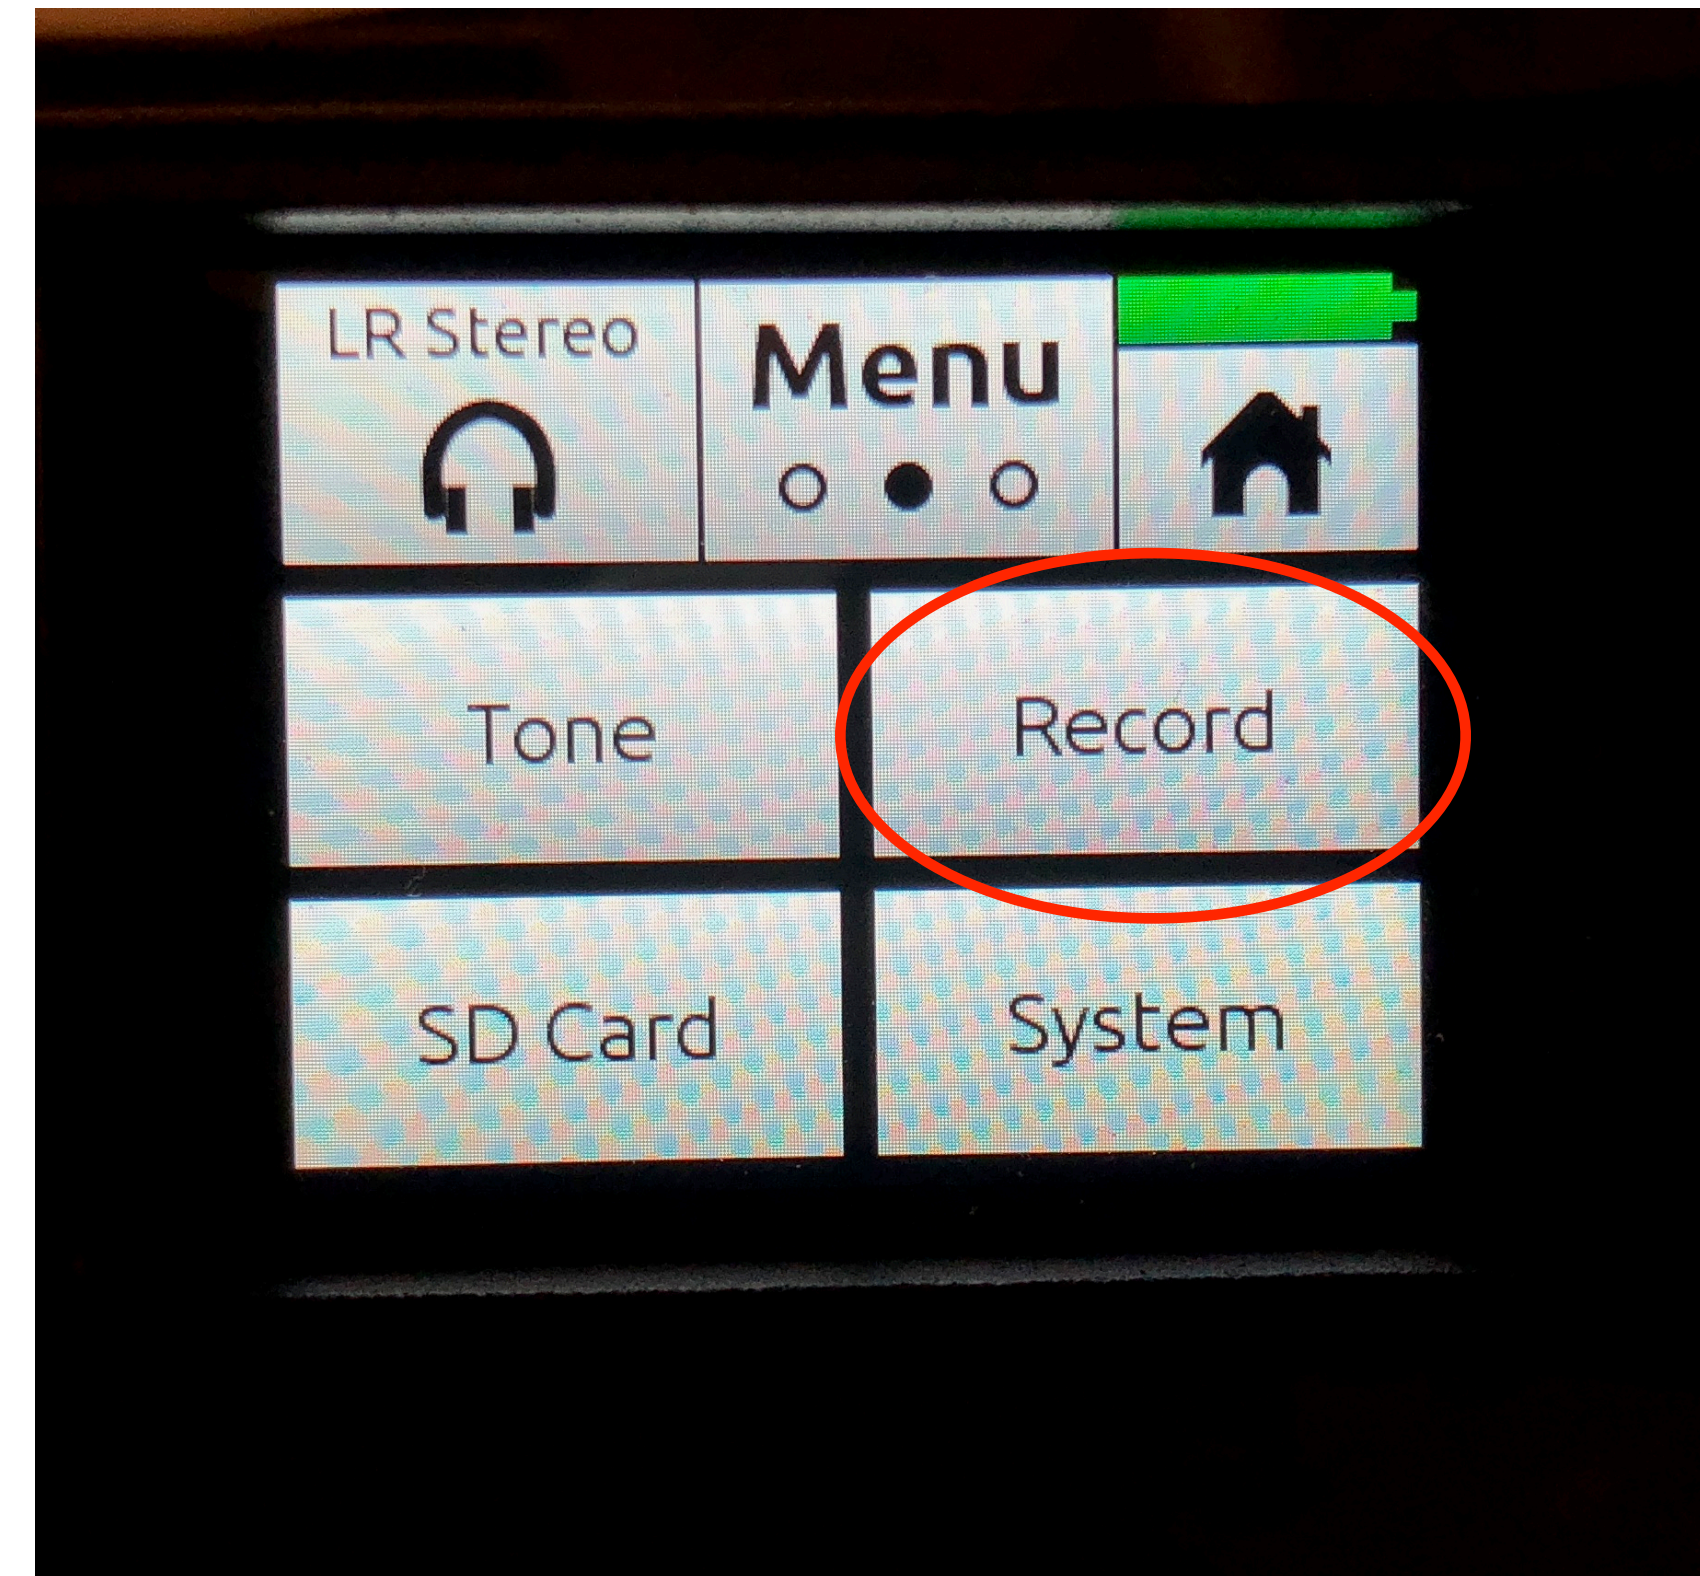


Setup for recording individual channels without stereo mix down

1. Power on MixPre-3 and Press Menu
2. Navigate to the 2nd page and press System.
3. Select Custom...
4. SD will warn you to turn all knobs down. Press Ok. Custom will turn green.
5. Press Back and select Custom Setup.
6. Select Channel Advanced and Record Advanced.
7. Press Back and go to menu page and select Record.
8. Select Record L&R and go to Page 2

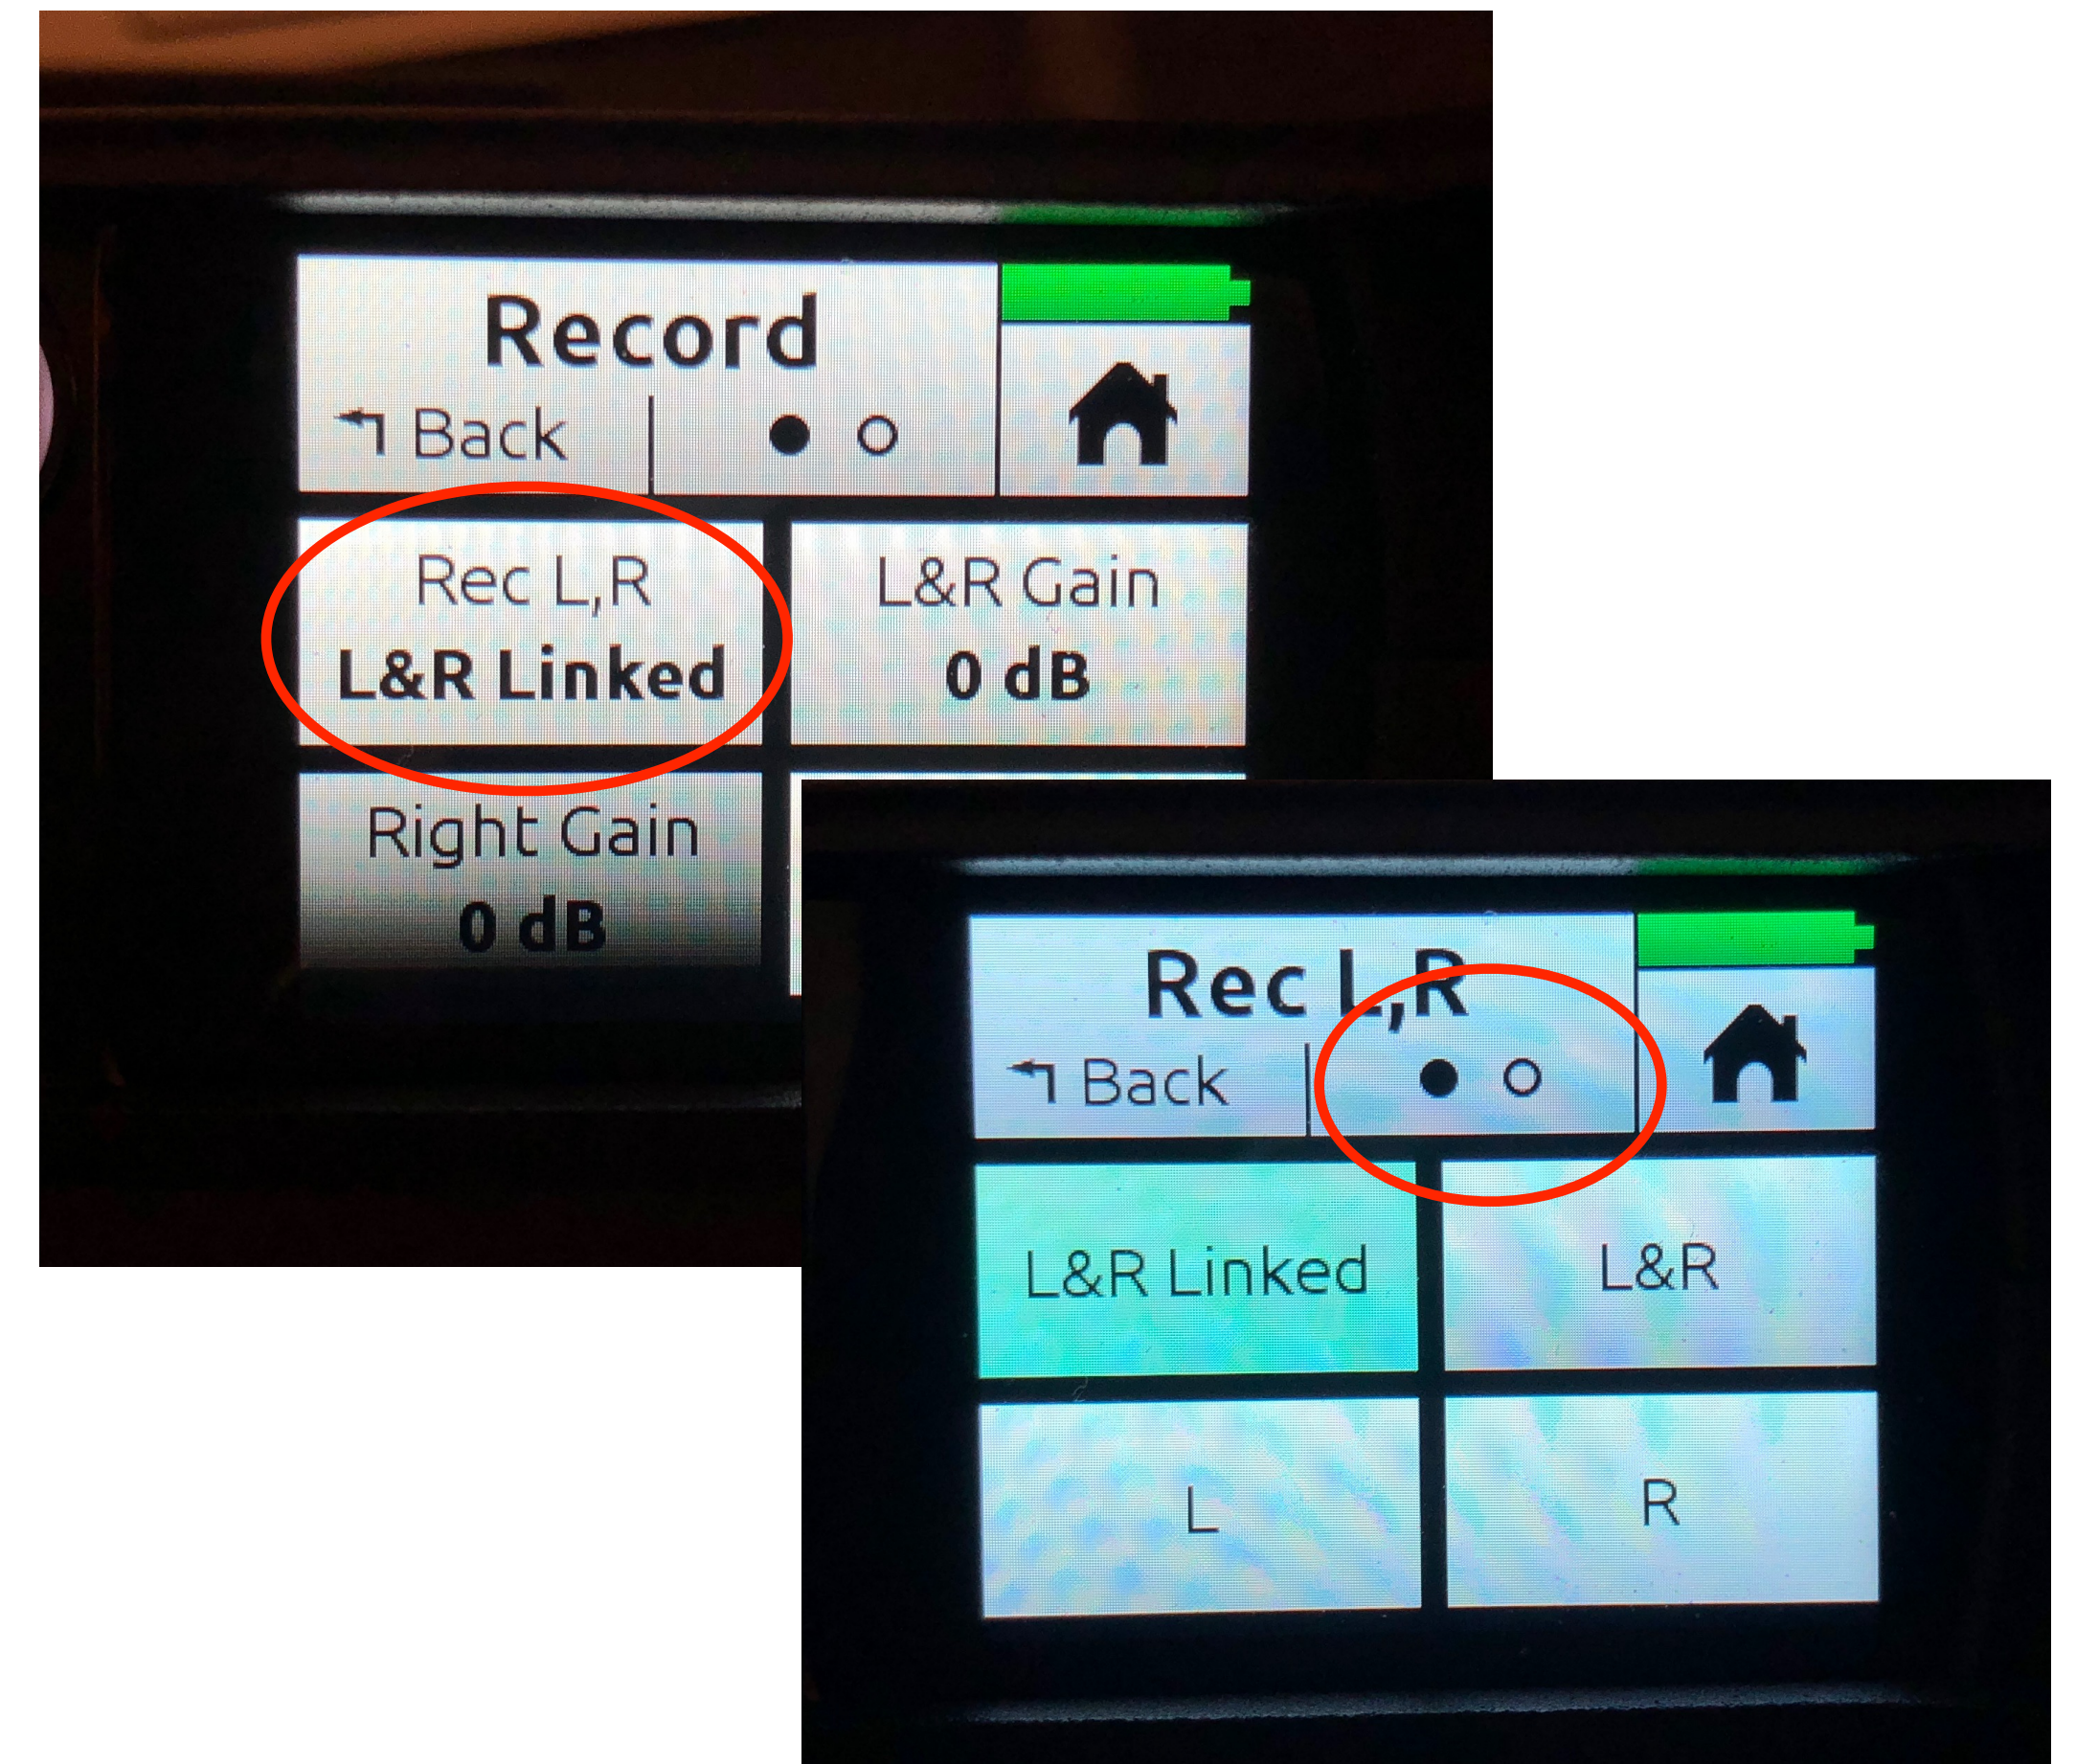

Setup for recording individual channels without stereo mix down


1. Power on MixPre-3 and Press Menu
2. Navigate to the 2nd page and press System.
3. Select Custom...
4. SD will warn you to turn all knobs down. Press Ok. Custom will turn green.
5. Press Back and select Custom Setup.
6. Select Channel Advanced and Record Advanced.
7. Press Back and go to menu page and select Record.
8. Select Record L&R and go to Page 2
9. Press Off.
10. When you press Home the L&R record should now be disarmed. Now you can record just the channels you arm.

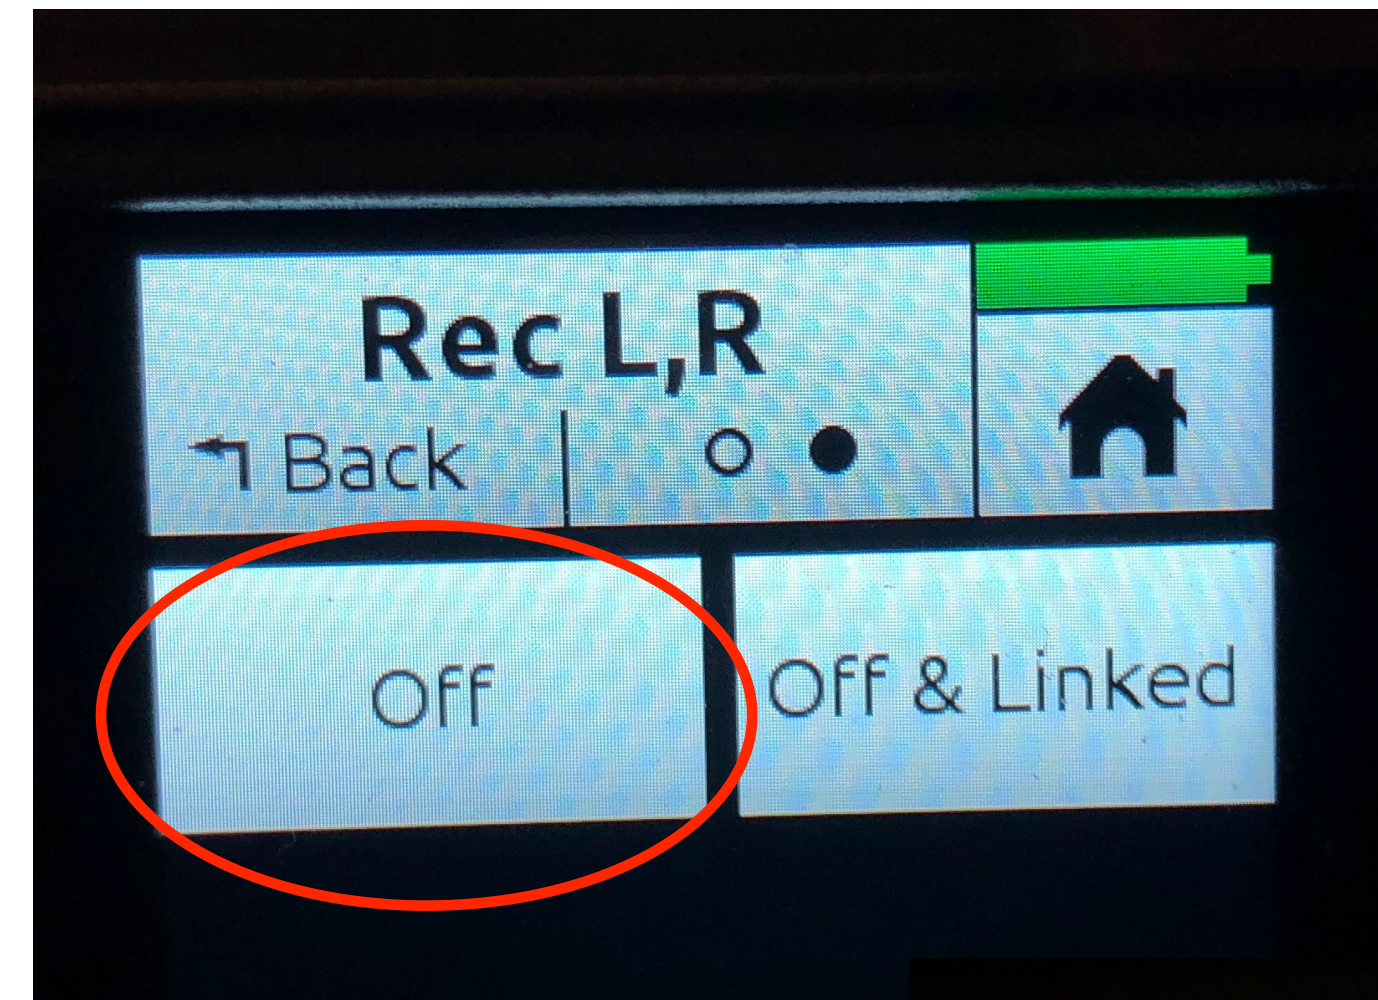

Timecode Setup


Setup for timecode recording

1. Power on MixPre-3 and Press Menu

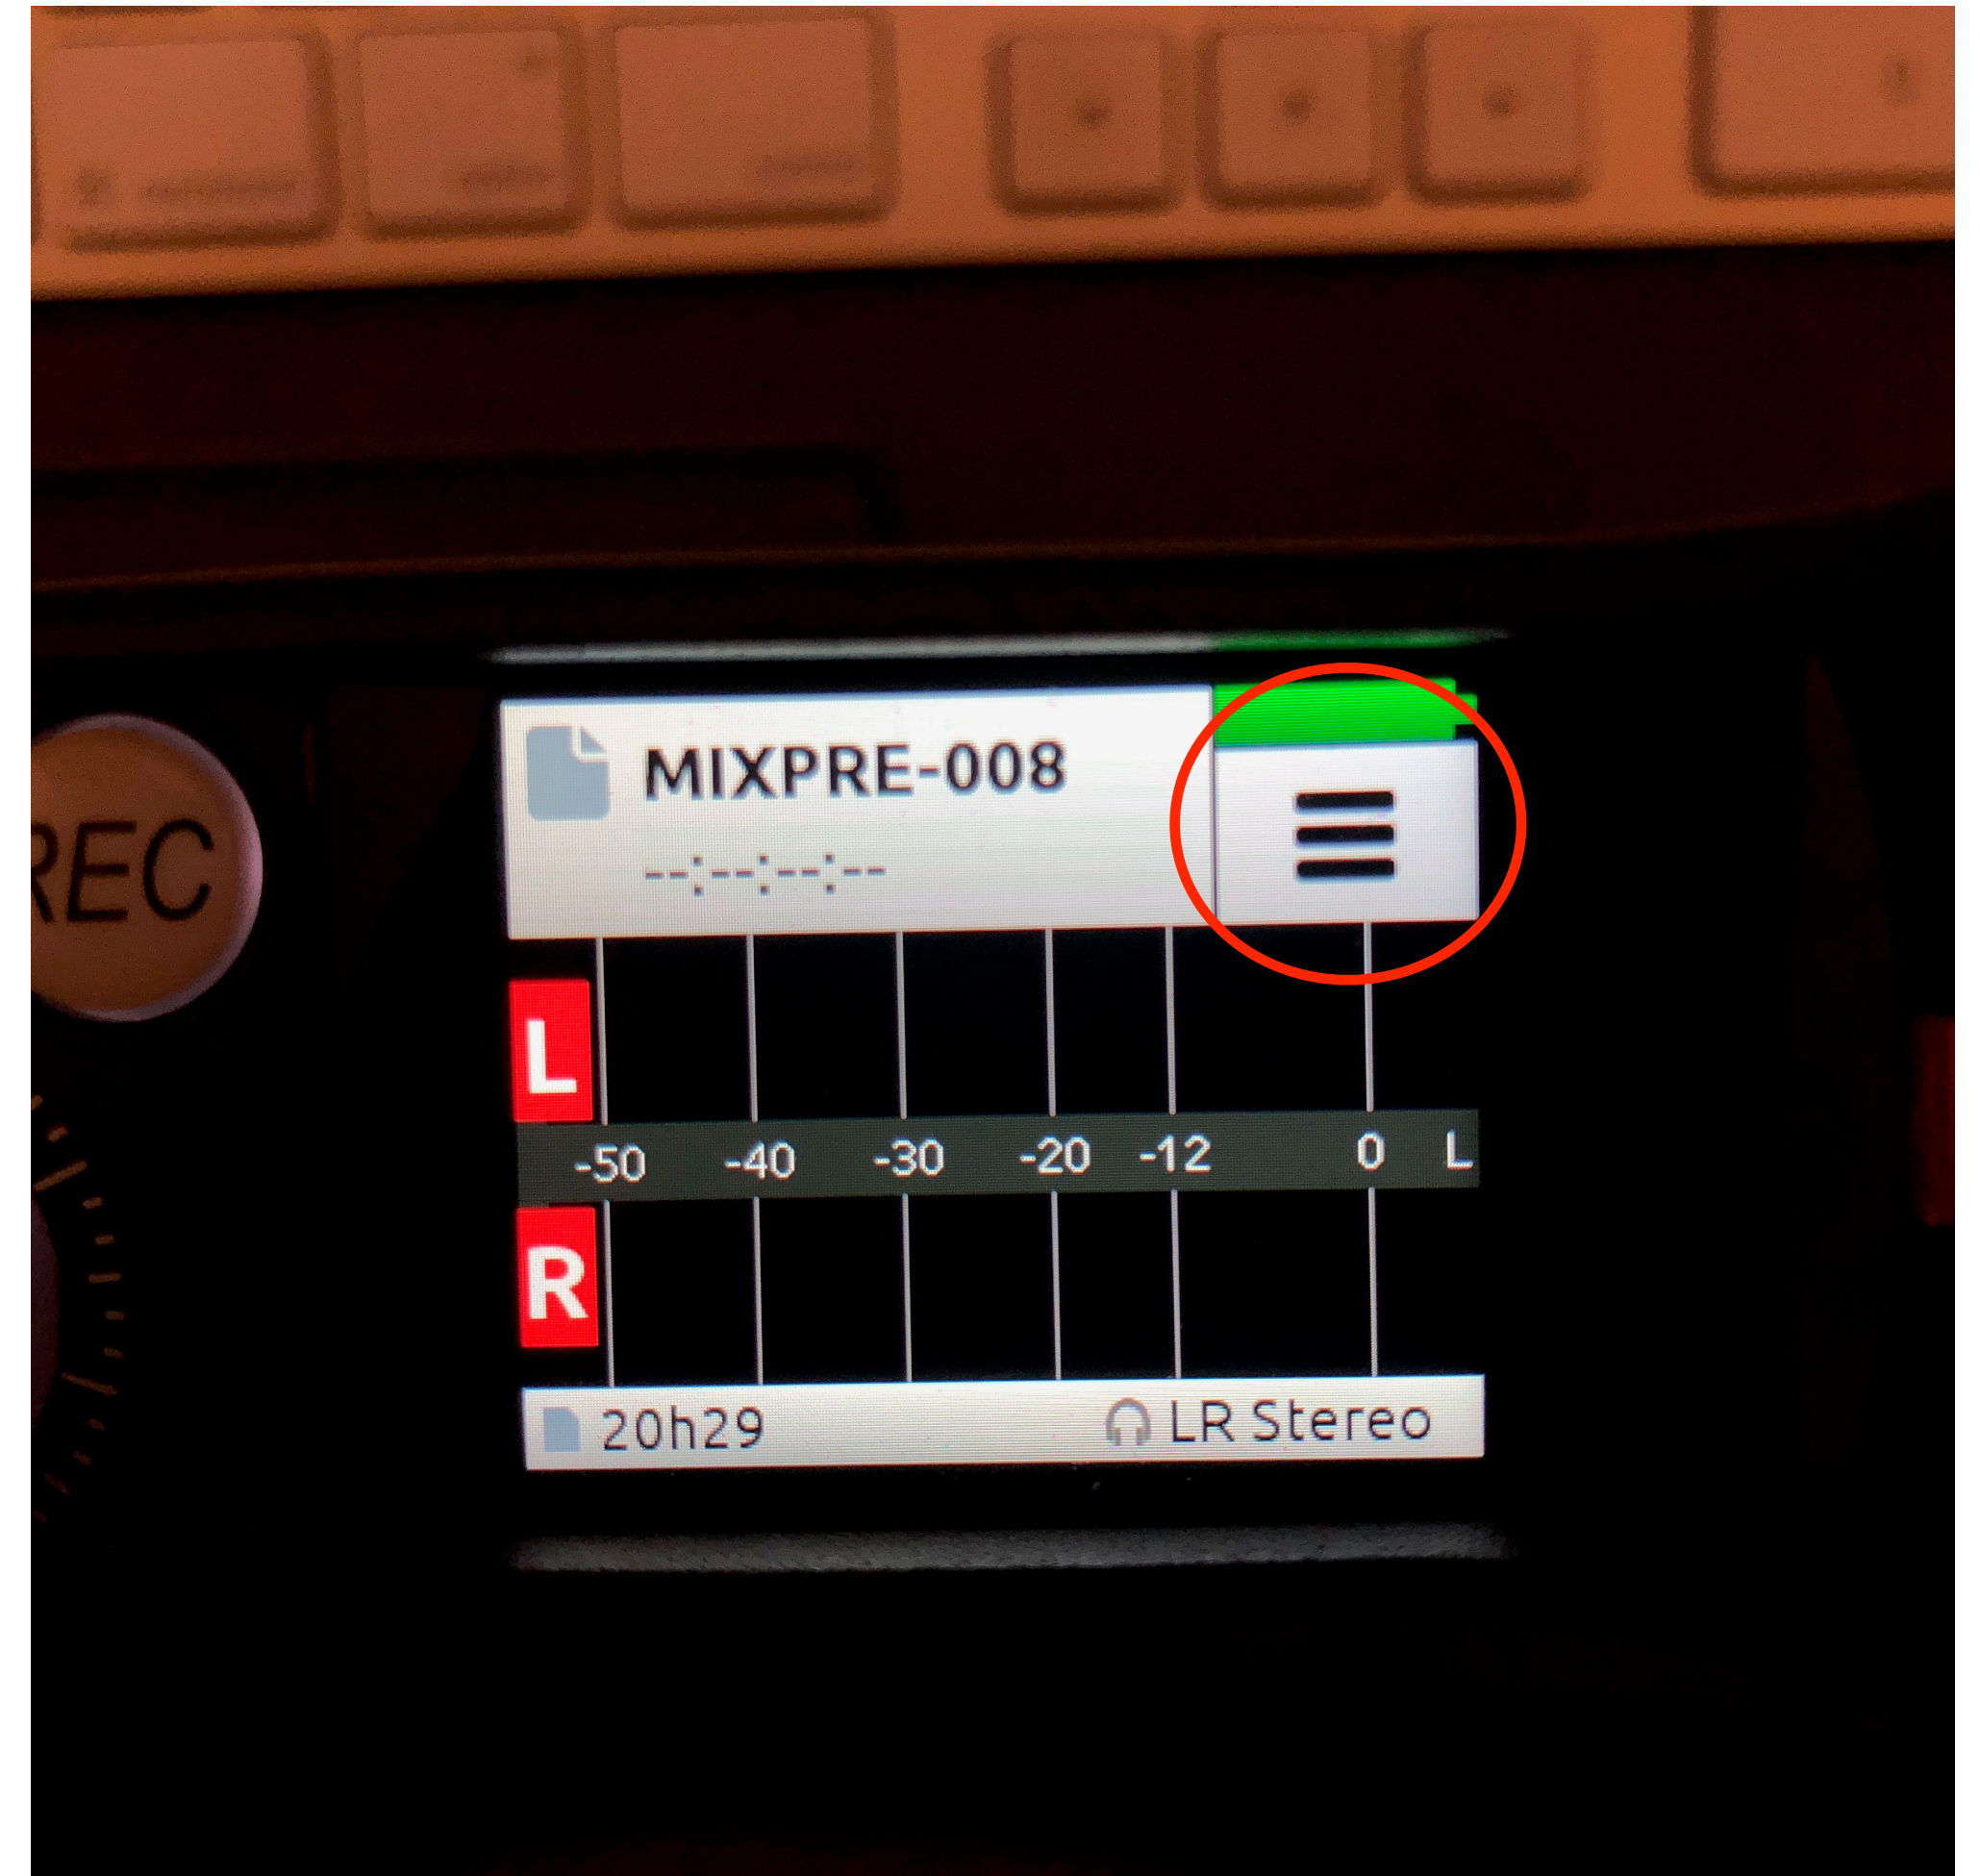


Setup for timecode recording

1. Power on MixPre-3 and Press Menu
2. Select Inputs...

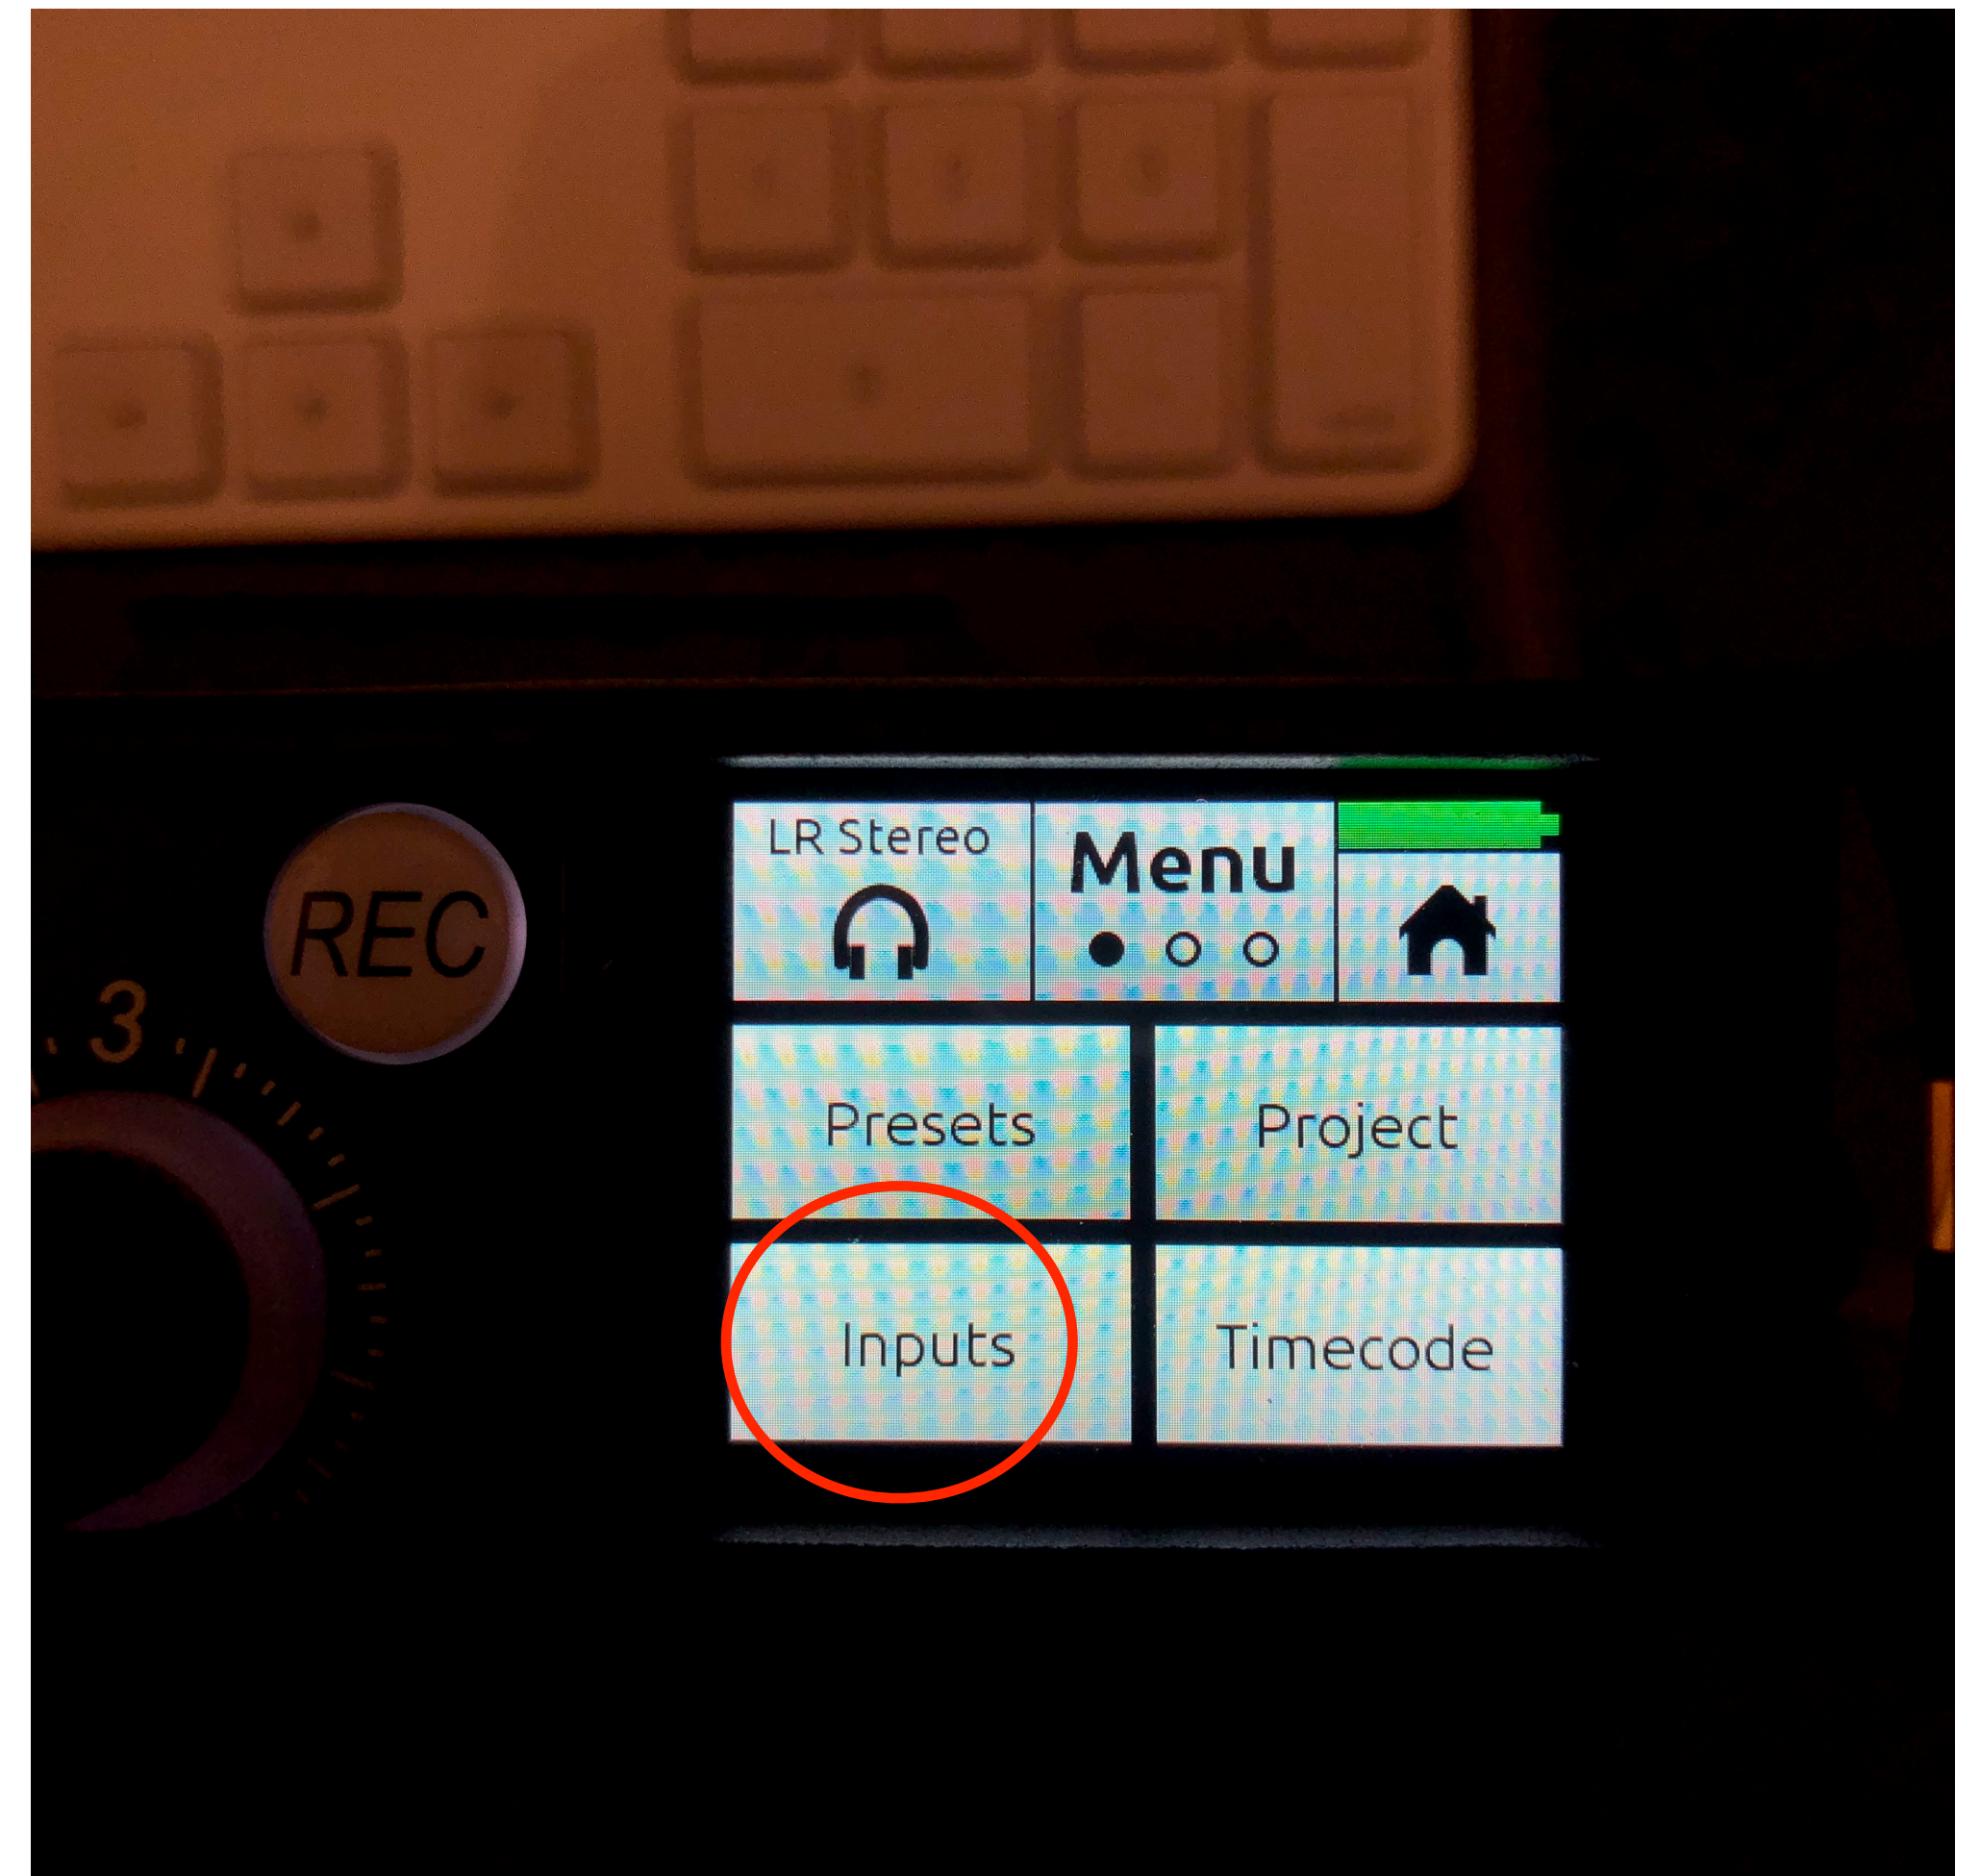


Setup for timecode recording

1. Power on MixPre-3 and Press Menu
2. Select Inputs...
3. Select Aux In Mode

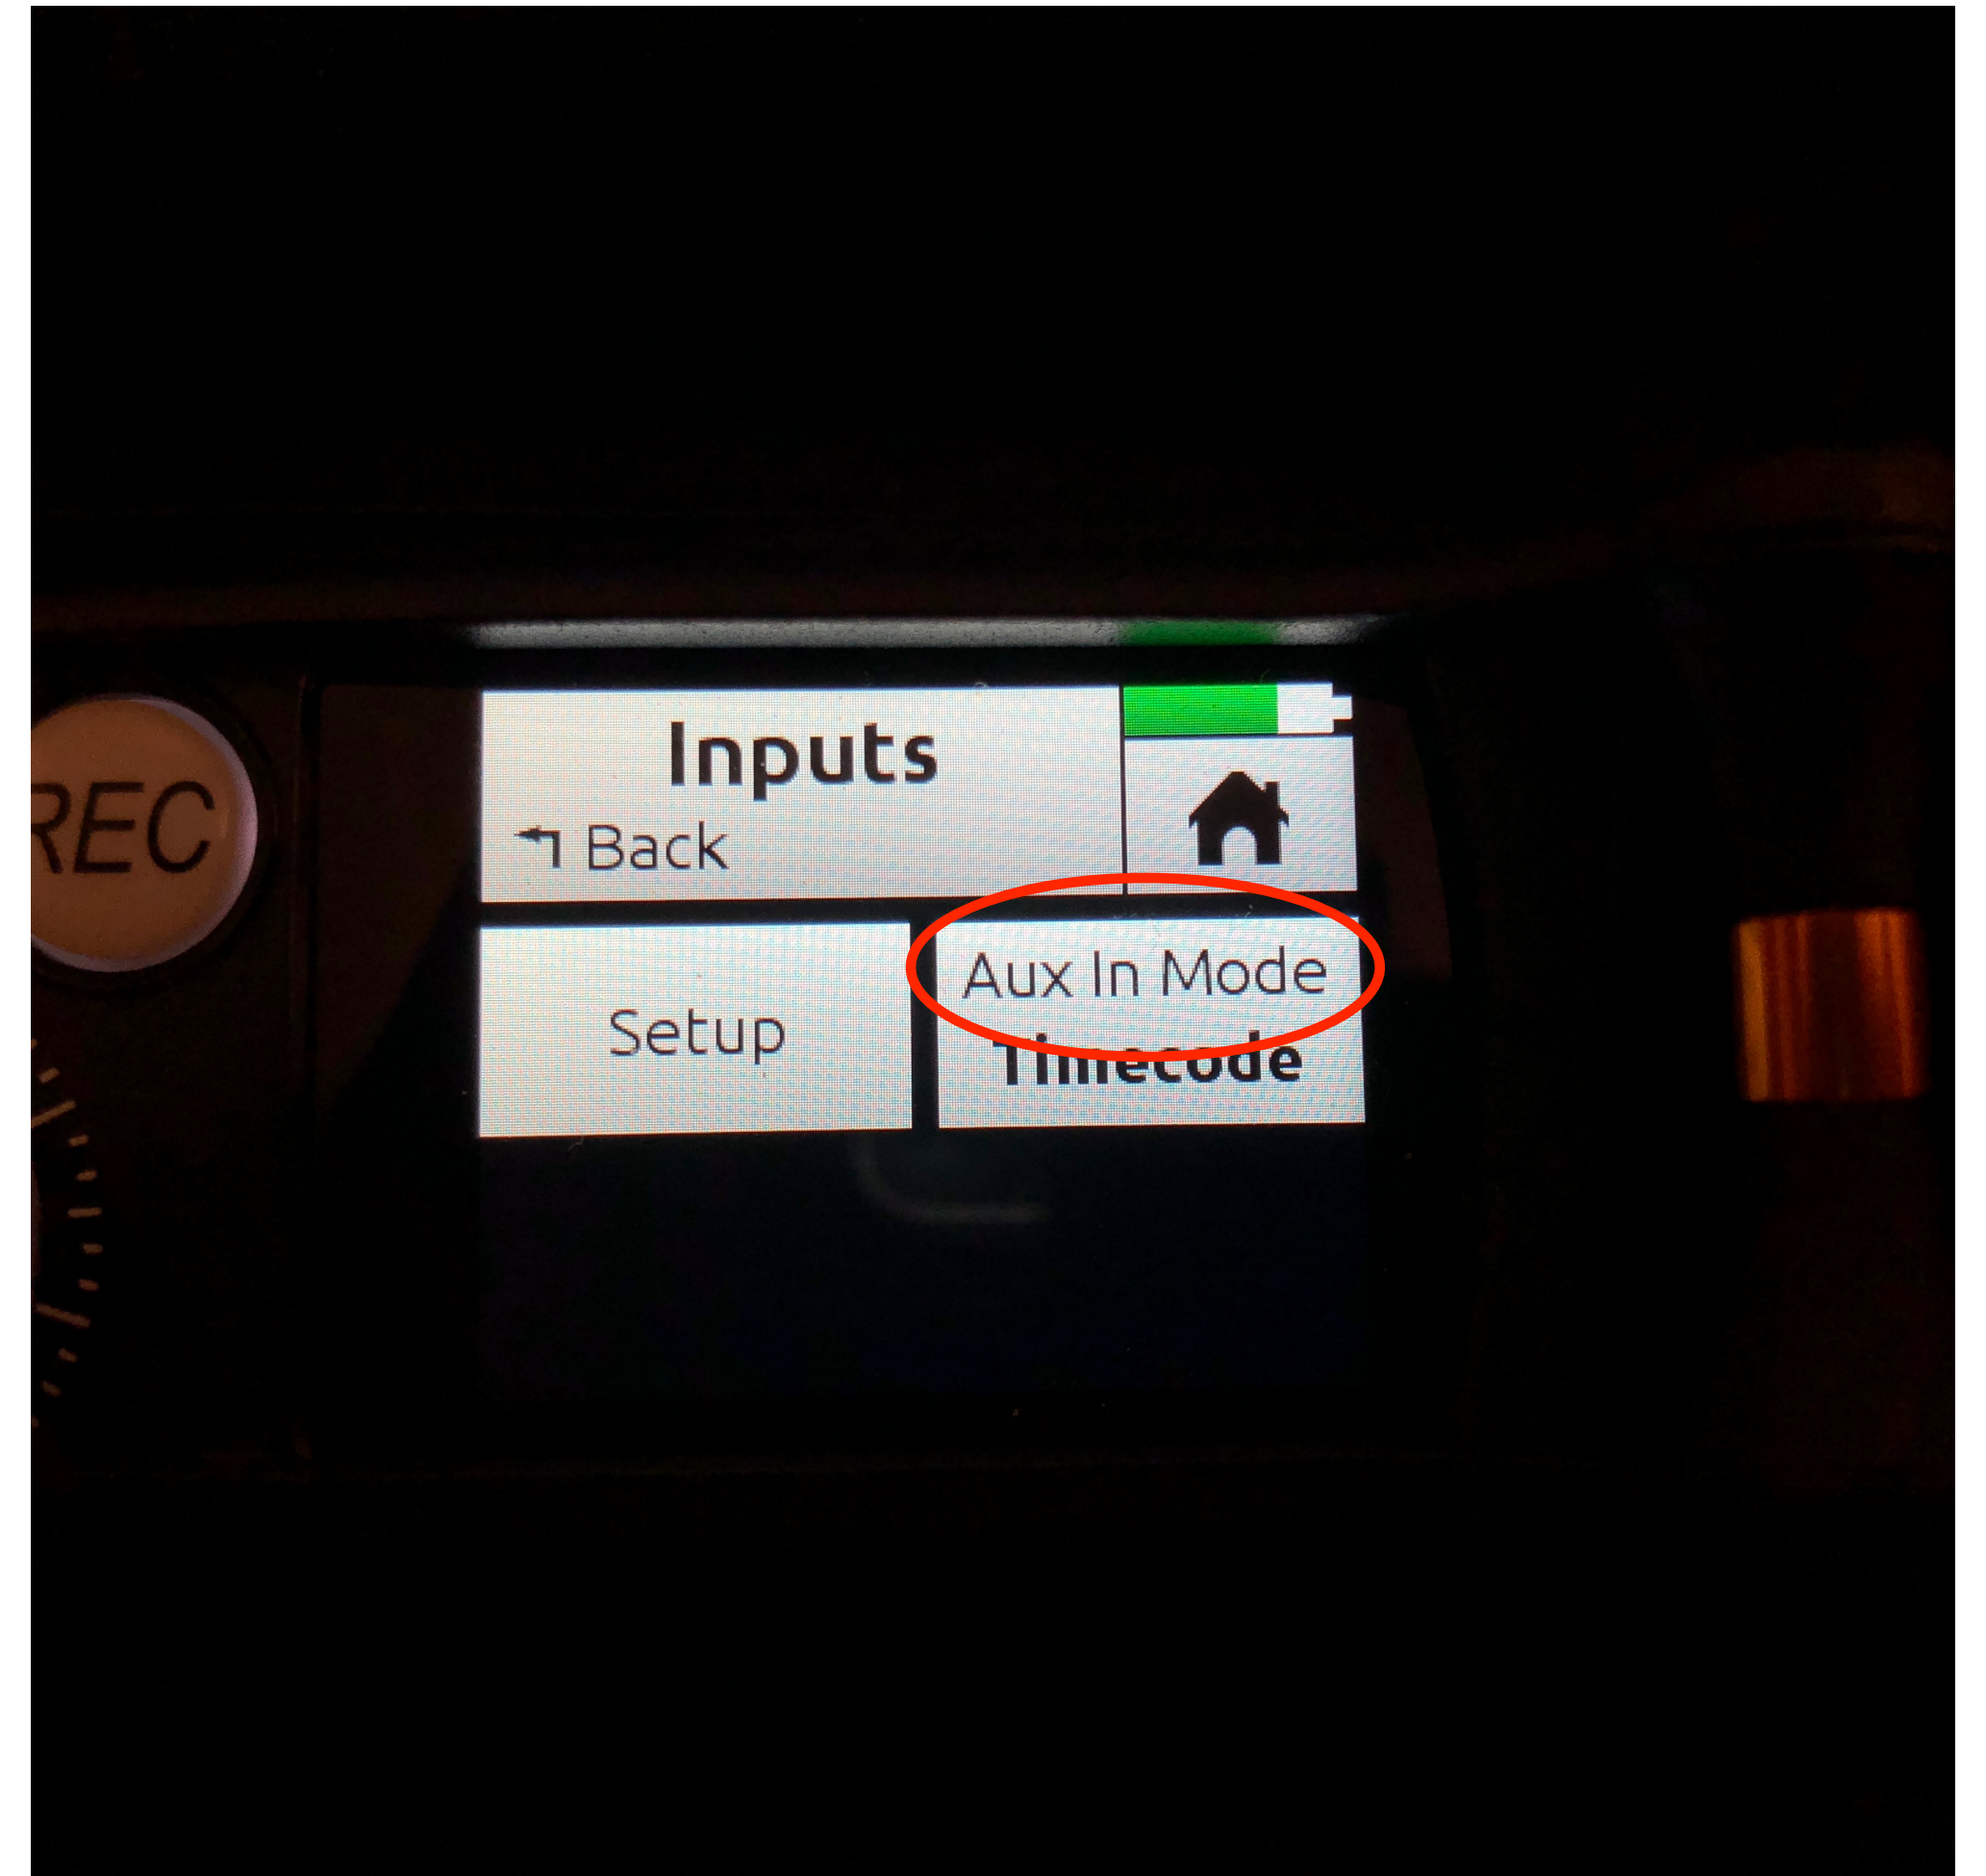


Setup for timecode recording

1. Power on MixPre-3 and Press Menu
2. Select Inputs...
3. Select Aux In Mode
4. Select Timecode.

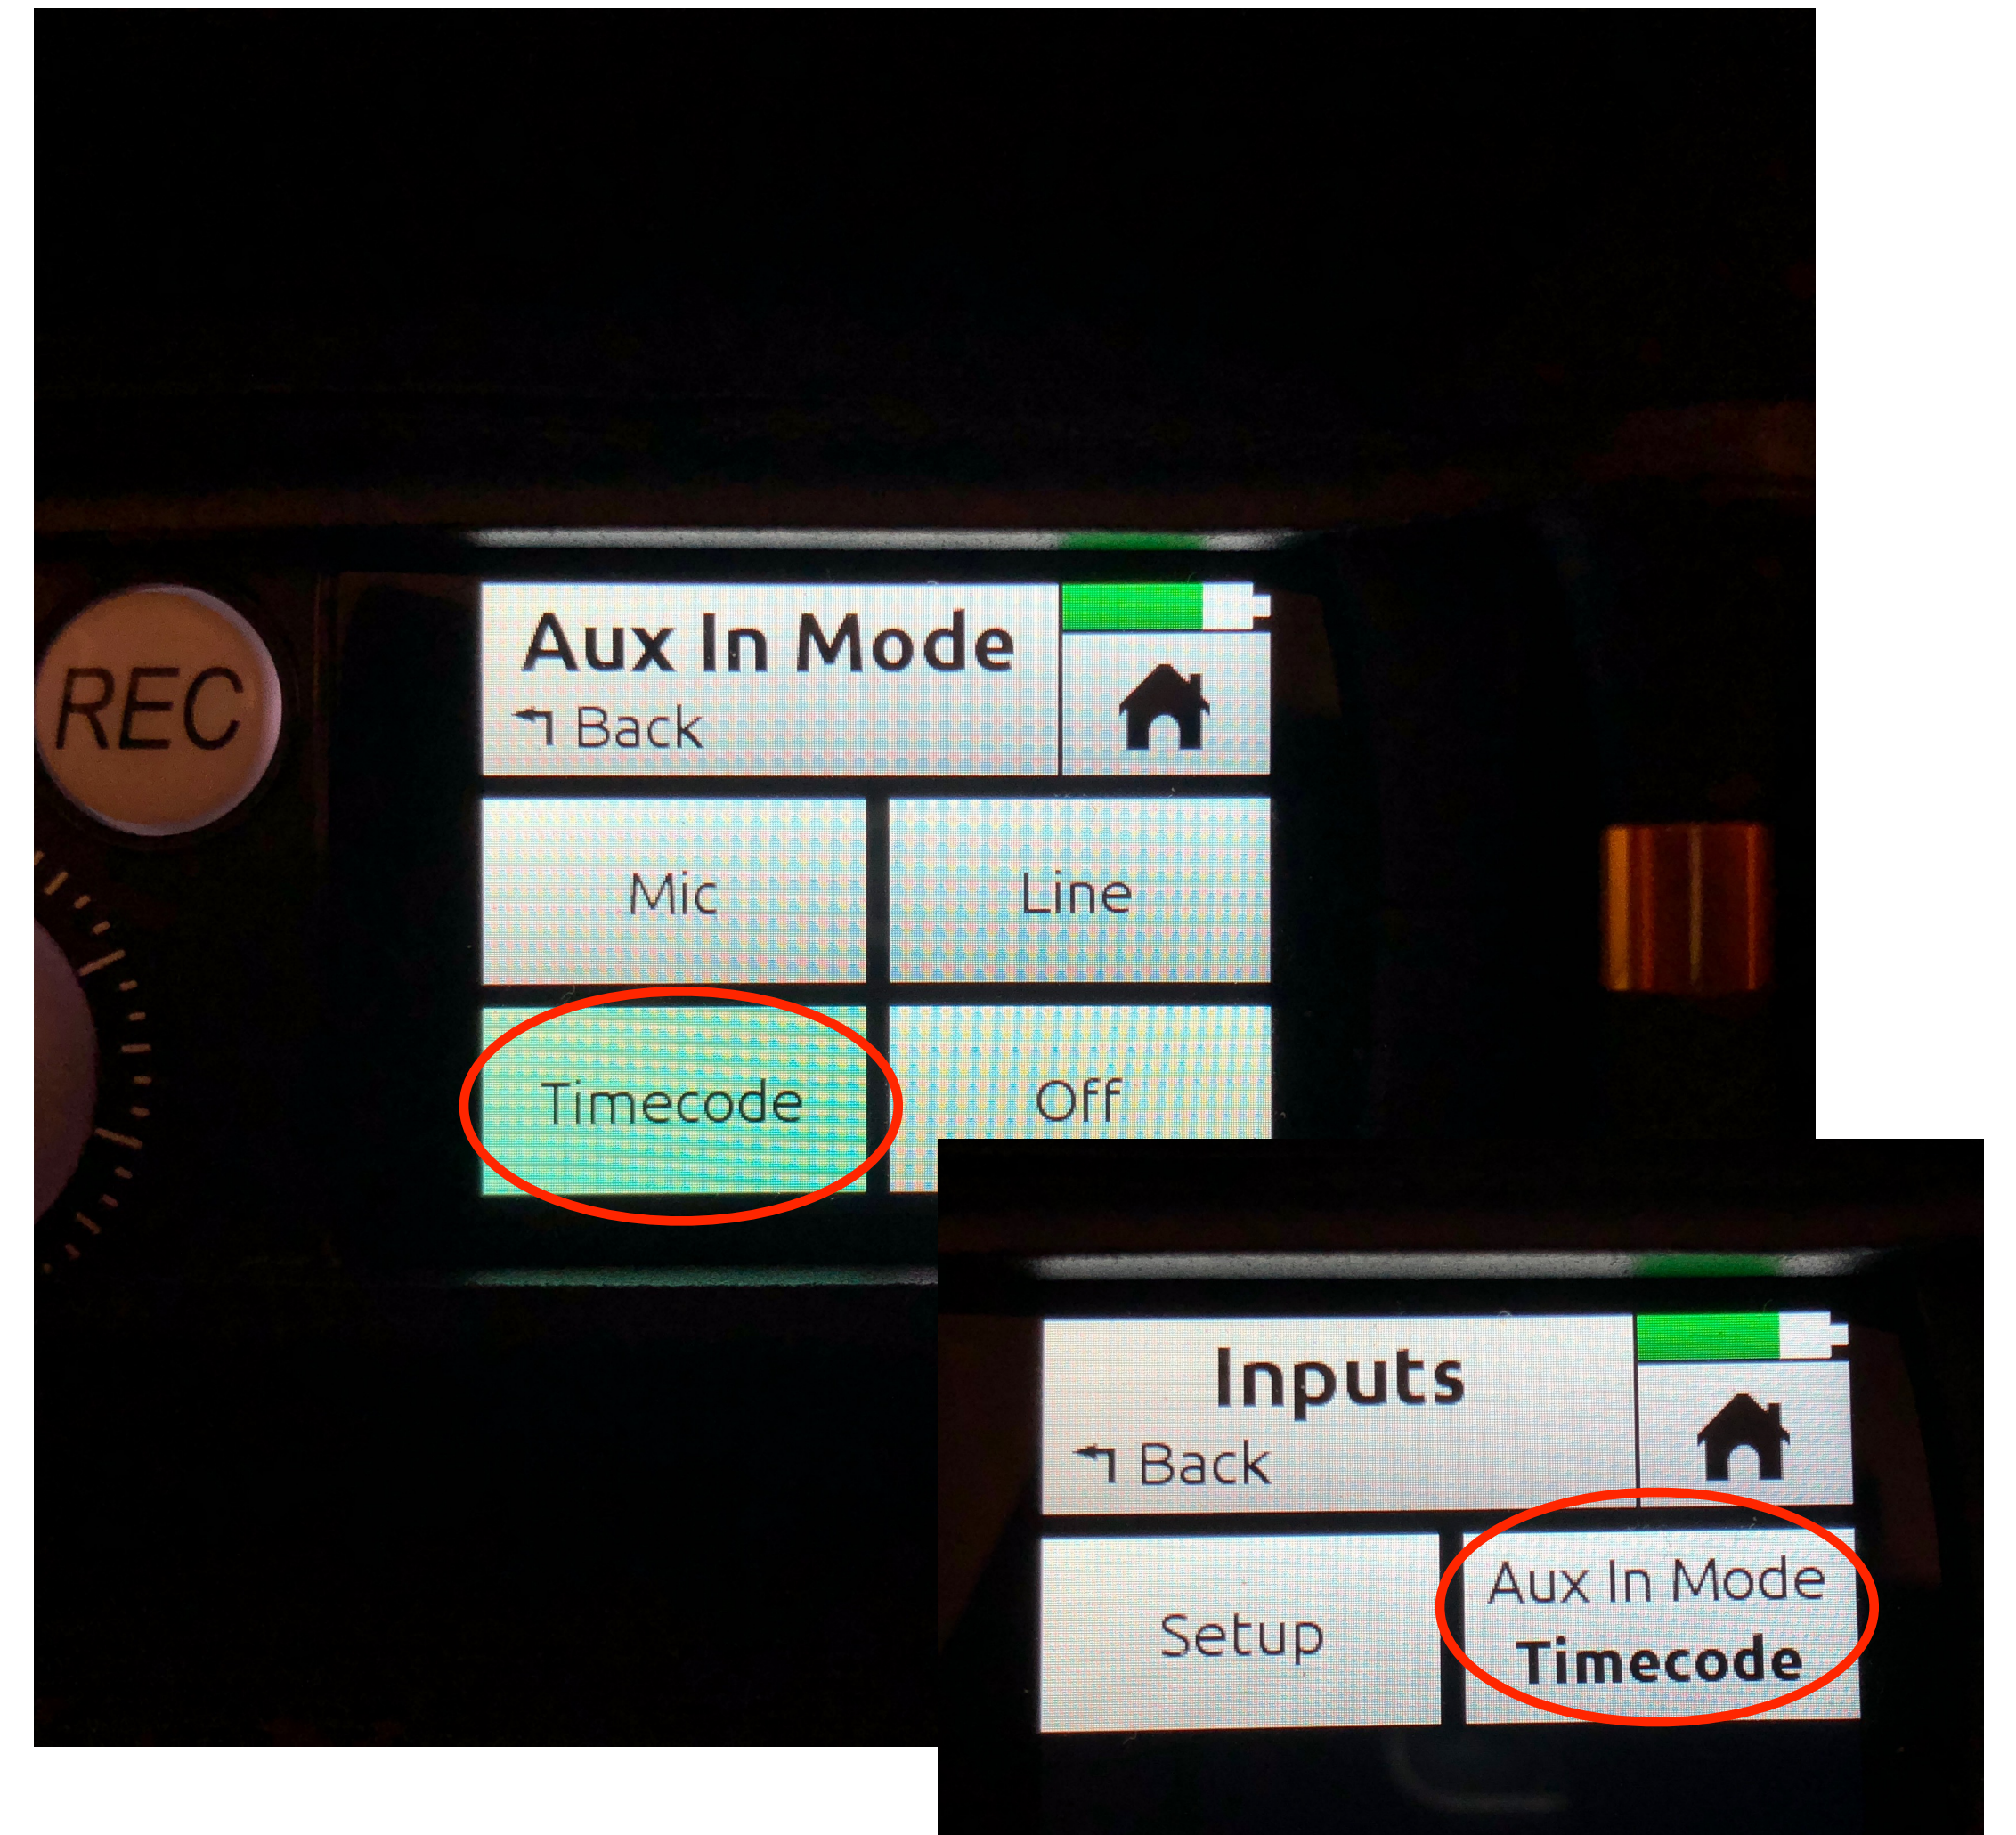



Setup for timecode recording

1. Power on MixPre-3 and Press Menu
2. Select Inputs...
3. Select Aux In Mode
4. Select Timecode.
5. Press Back twice and select Timecode.

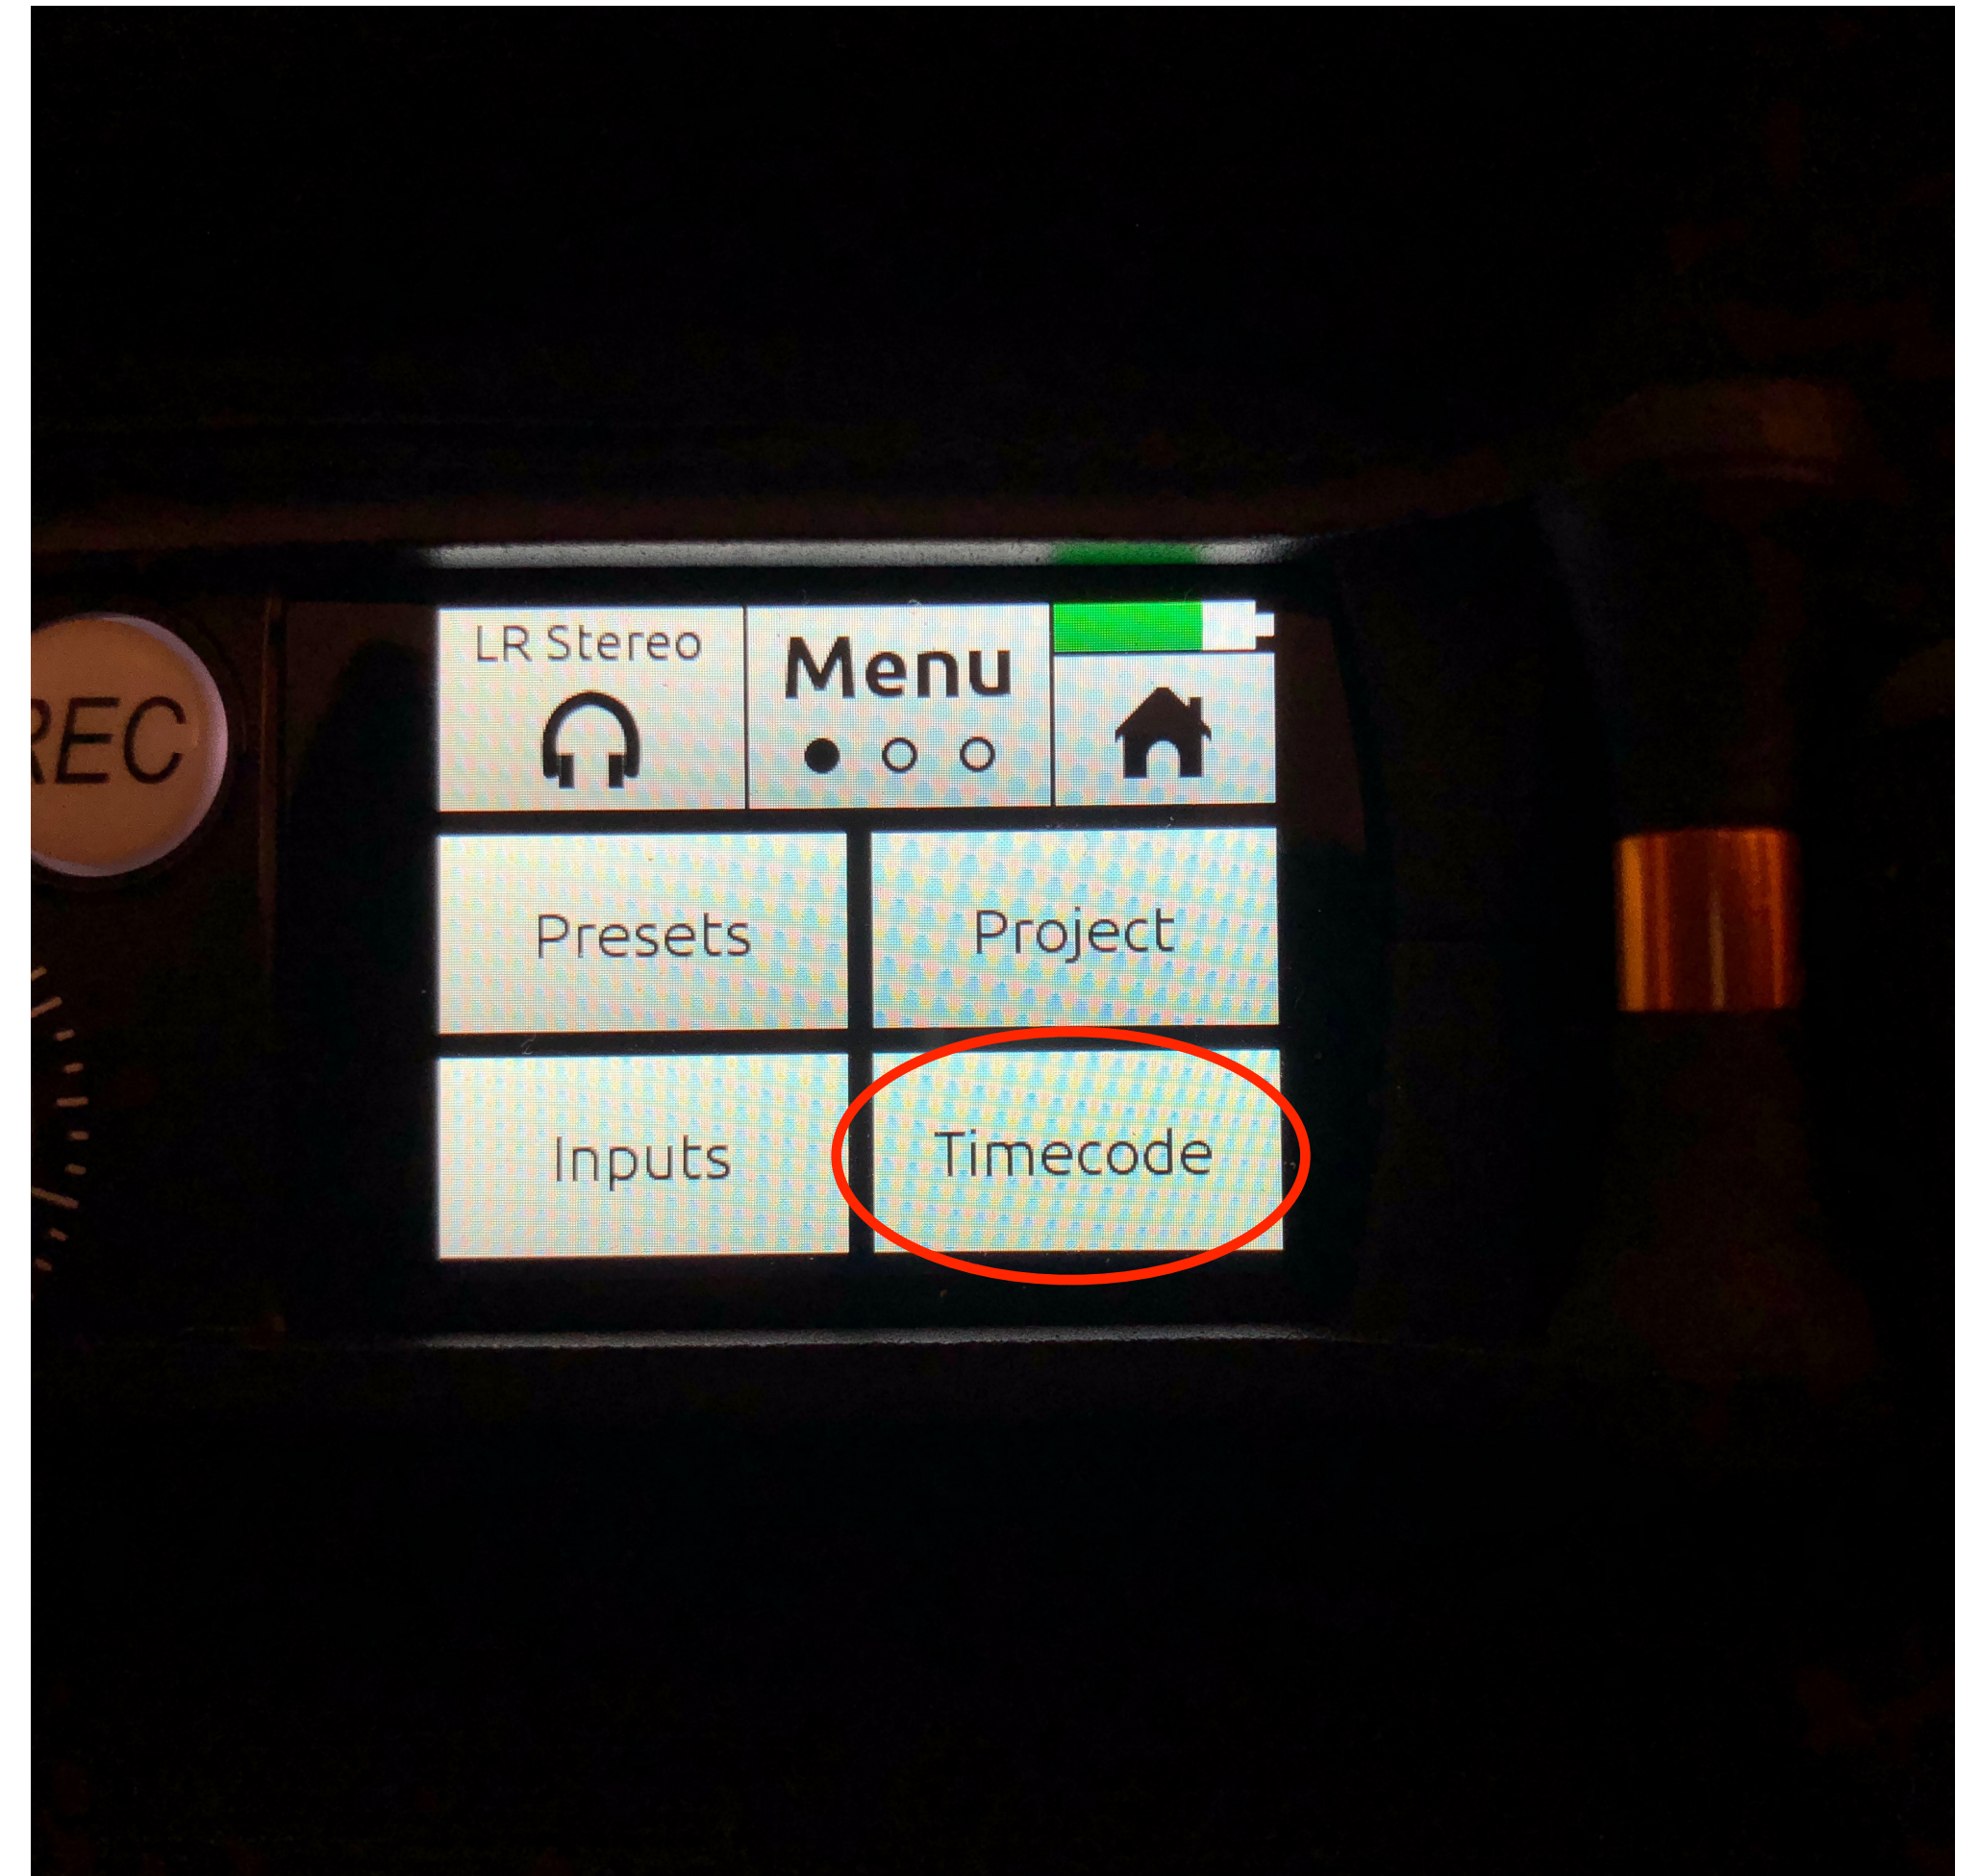

Setup for timecode recording

1. Power on MixPre-3 and Press Menu
2. Select Inputs...
3. Select Aux In Mode
4. Select Timecode.
5. Press Back twice and select Timecode.
6. Select TC Mode and choose Aux 1.

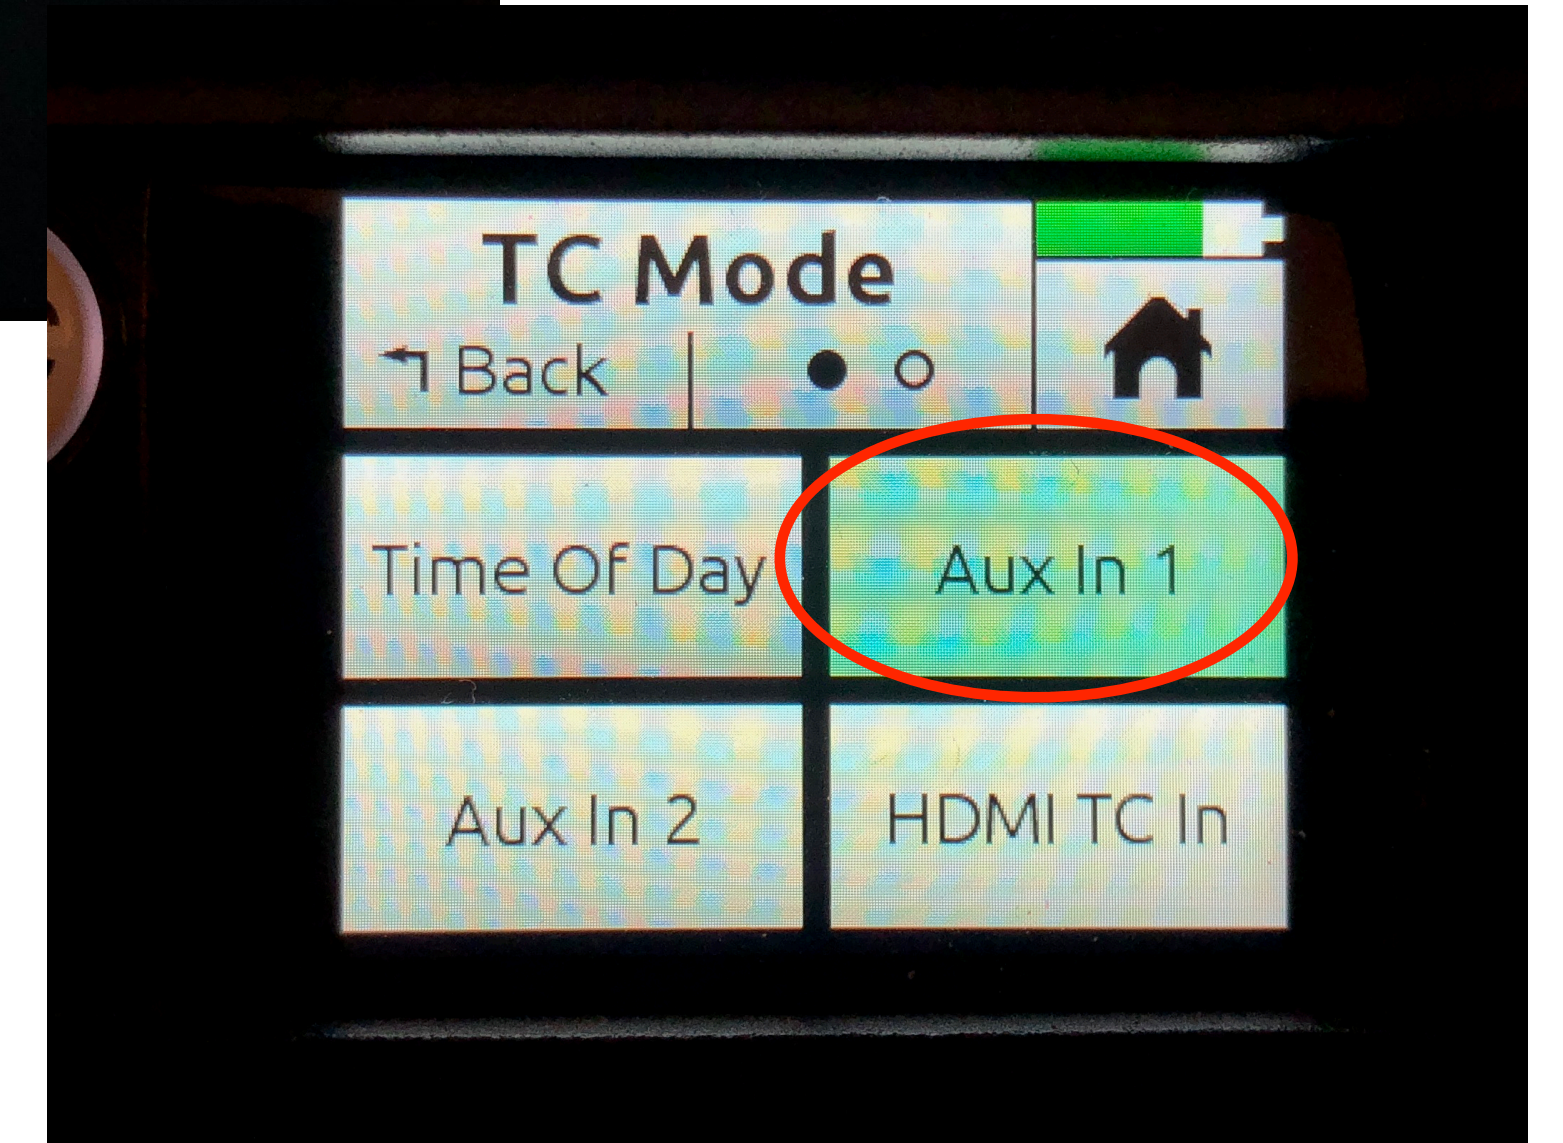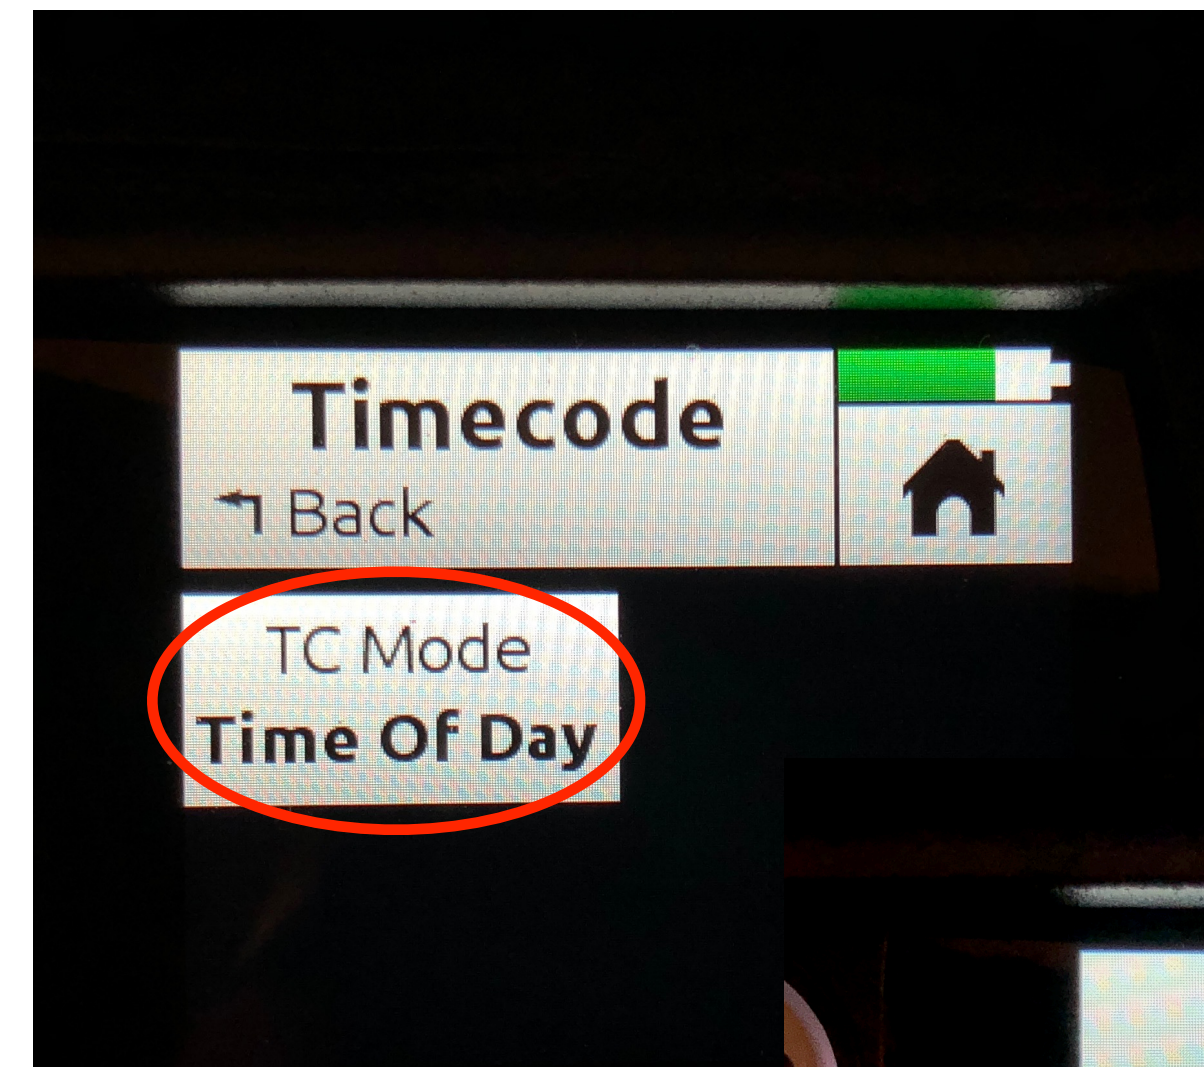

Setup for timecode recording

1. Power on MixPre-3 and Press Menu
2. Select Inputs...
3. Select Aux In Mode
4. Select Timecode.
5. Press Back twice and select Timecode.
6. Select TC Mode and choose Aux 1.
7. You should now see timecode on the home screen.

